
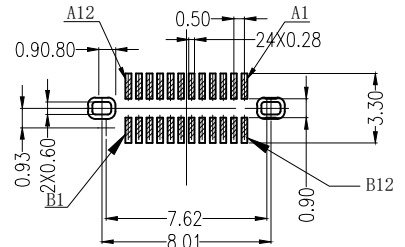

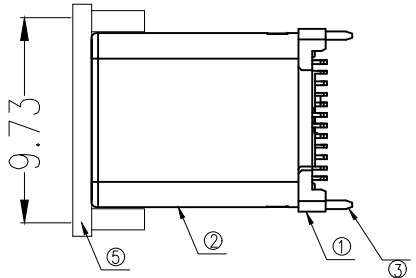


F | E | D | C | B | A




NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

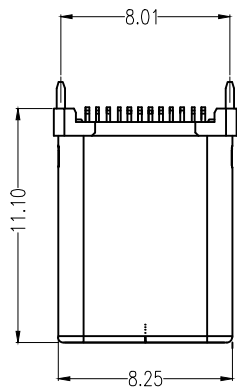


RECOMMENDED PCB LAYOUT($\pm 0.80 \pm 0.05$)
COMPONENT SIDE(GENERAL TOLERANCE: ± 0.05)

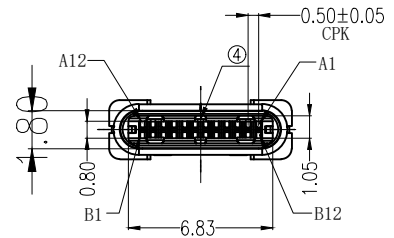

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	COVER	HIGH TEMPERATURE PLASTIC	LCP BLACK	1PCS
4	SPRING	STAINLESS STEEL	---	2PCS
3	LATCH	STAINLESS STEEL	TIN: 80~120u"Min/Ni base: 50u"Min Plated	1PCS
2	SHELL	STAINLESS STEEL	Ni: 50u"Min Plated	1PCS
1	TERMINAL HOUSING	HIGH TEMPERATURE PLASTIC	LCP BLACK/CONTACT: Au: 1u"Min Ni base: 50u"Min	2PCS

DESIGN	MISS ZENG	SC ALL		 未注公差 TOLERANCE	品名:	连接器
DRAWIGN	MISS LI	ANIT	MM		型号:	TYPE-C 3.1 直立式公头无脚拉伸壳无定位柱
CHECK	Mr. ZENG	SIZE	A4: 210*297			
APPROVAL		VERSION	01			



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

F | E | D | C | B | A