


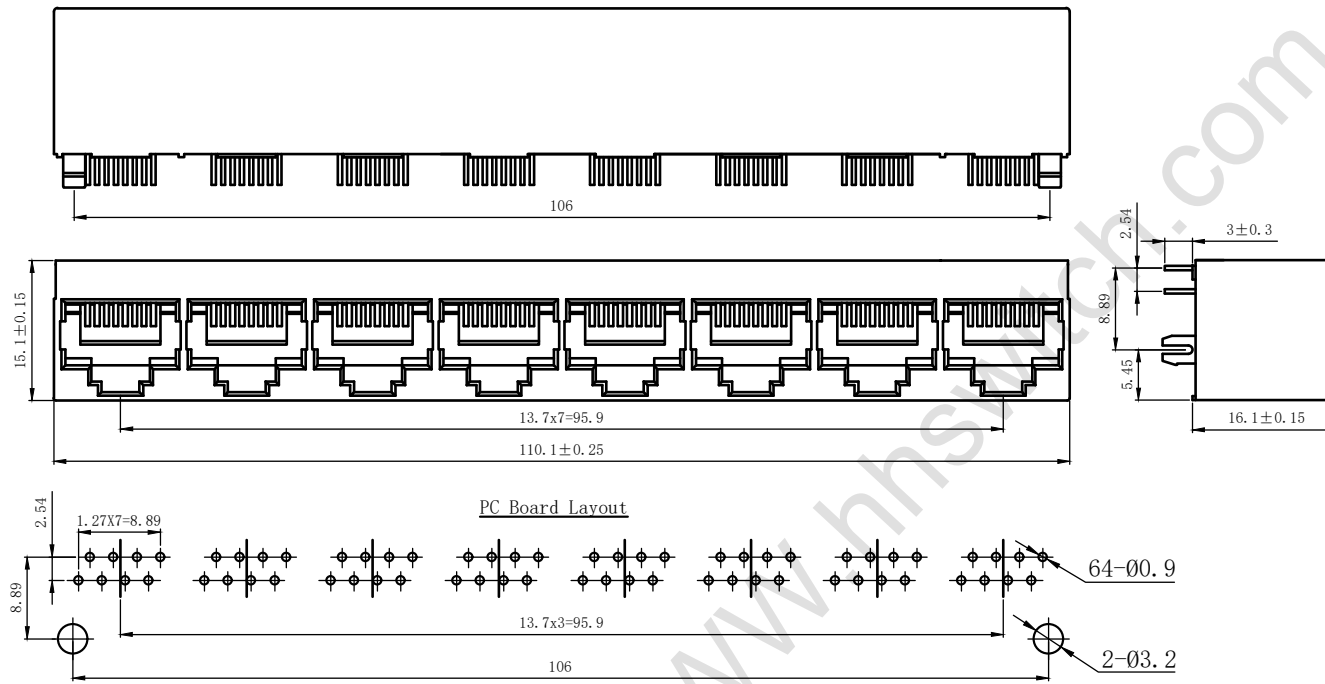

SPECIFICATIONS

ELECTRICAL

- 1. CURRENT RATING: 1.5AMPS@25° C
 - 2. VOLTAGE RATING: 125V AC
 - 3. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
 - 4. WITHSTANDING VOLTAGE: 1000V AC RMS OR1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
 - 5. CONTACT RESISTANCE: ≥30mΩ Max
- WORKING TEMPERATURE: -40°C ~ +85°C

MECHANICAL

- 1. MATING FORCE: 30N Max
- 2. RETENTION STRENGTH: ≥76N
- 3. DURABILITY: ≥750 CYCLES MIN

MATERIAL

- 1. HOUSING: PA FILLED WITH FIBERGLASS
- 2. INSERT MATERIAL: PA FILLED WITH FIBERGLASS
- 3. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
- 4. CONTACT PLATING: GOLD PLATING OVER NICKEL
F μ "INCH, 3 μ "INCH, 6 μ "INCH, 15 μ "INCH, 30 μ "INCH, 50 μ "INCH

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名：
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°	网口连接器
CHECK	Mr. ZENG	SIZE	A4：210*297		.00 ±0.15		型号：
APPROVAL		VERSION	01		.000 ±0.1		HHRJ45-5218-8p8c



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.