


PC Board Layout

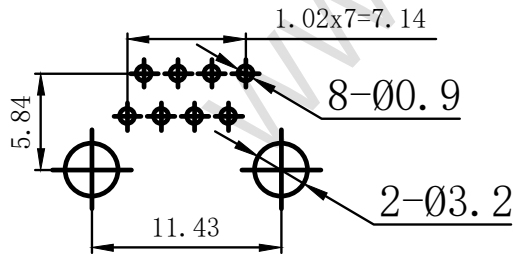

SPECIFICATIONS

ELECTRICAL

1. CURRENT RATING: 1.5AMPS@25° C
2. VOLTAGE RATING: 125V AC
3. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
4. WITHSTANDING VOLTAGE: 1000V AC RMS OR 1500V DC @ 0.5mA 50Hz or 60Hz 1Minute
5. CONTACT RESISTANCE: ≥30mΩ Max

WORKING TEMPERATURE: -40°C ~ +85°C

MECHANICAL

1. MATING FORCE: 30N Max
2. RETENTION STRENGTH: ≥76N
3. DURABILITY: ≥750 CYCLES MIN

MATERIAL

1. HOUSING: PA FILLED WITH FIBERGLASS
2. INSERT MATERIAL: PA FILLED WITH FIBERGLASS
3. CONTACT MATERIAL: PHOSPHOR BRONZE Ø0.46mm
4. CONTACT PLATING: GOLD PLATING OVER NICKEL
F μ " INCH, 3 μ " INCH, 6 μ " INCH, 15 μ " INCH, 30 μ " INCH, 50 μ " INCH



DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名： 网口连接器	
DRAWIGN	MISS LI	ANIT	MM		.0 ±0.20	ANGLES ±5°		型号： HHRJ45-5321-8p8c-1397
CHECK	Mr. ZENG	SIZE	A4 : 210*297		.00 ±0.15			
APPROVAL		VERSION	01		.000 ±0.1			



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.