
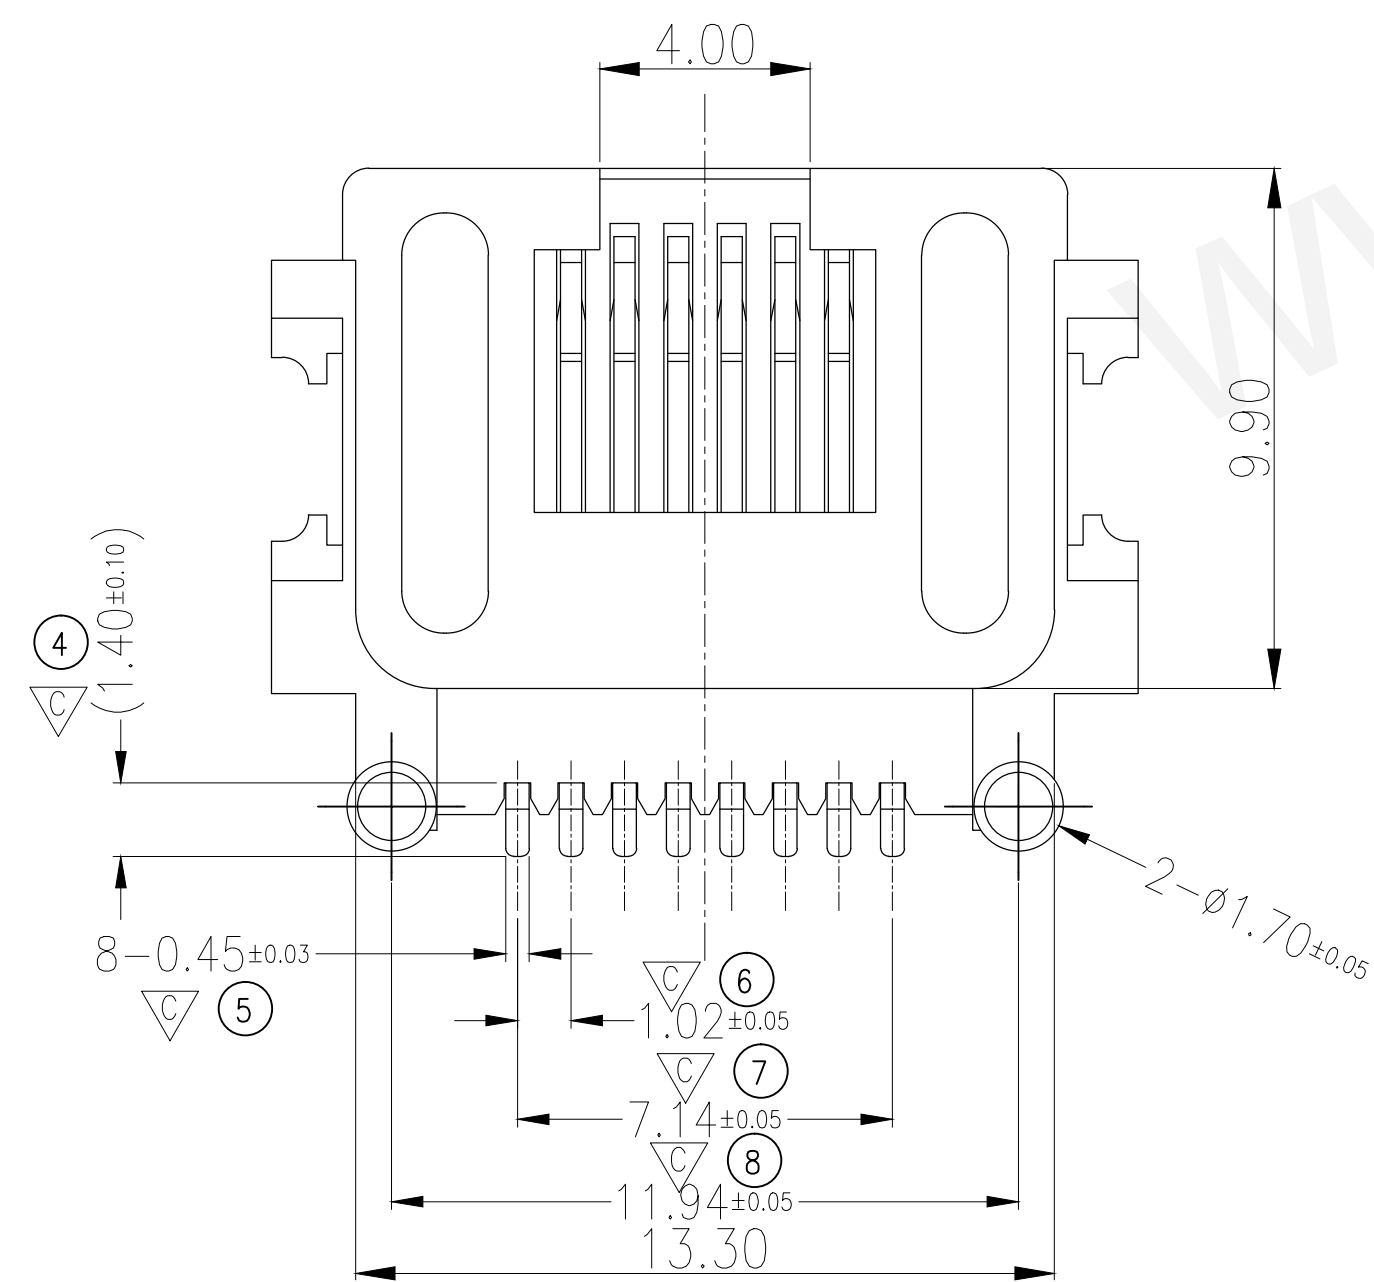
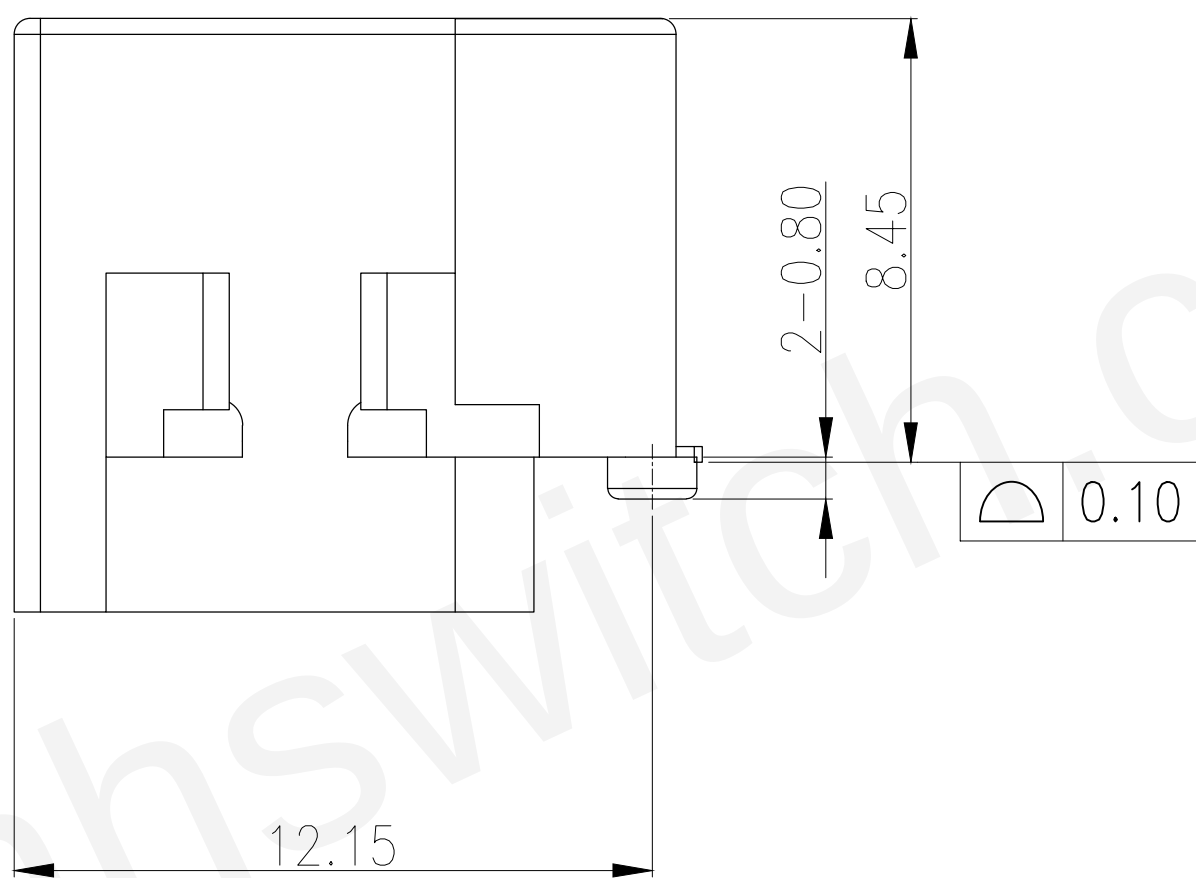
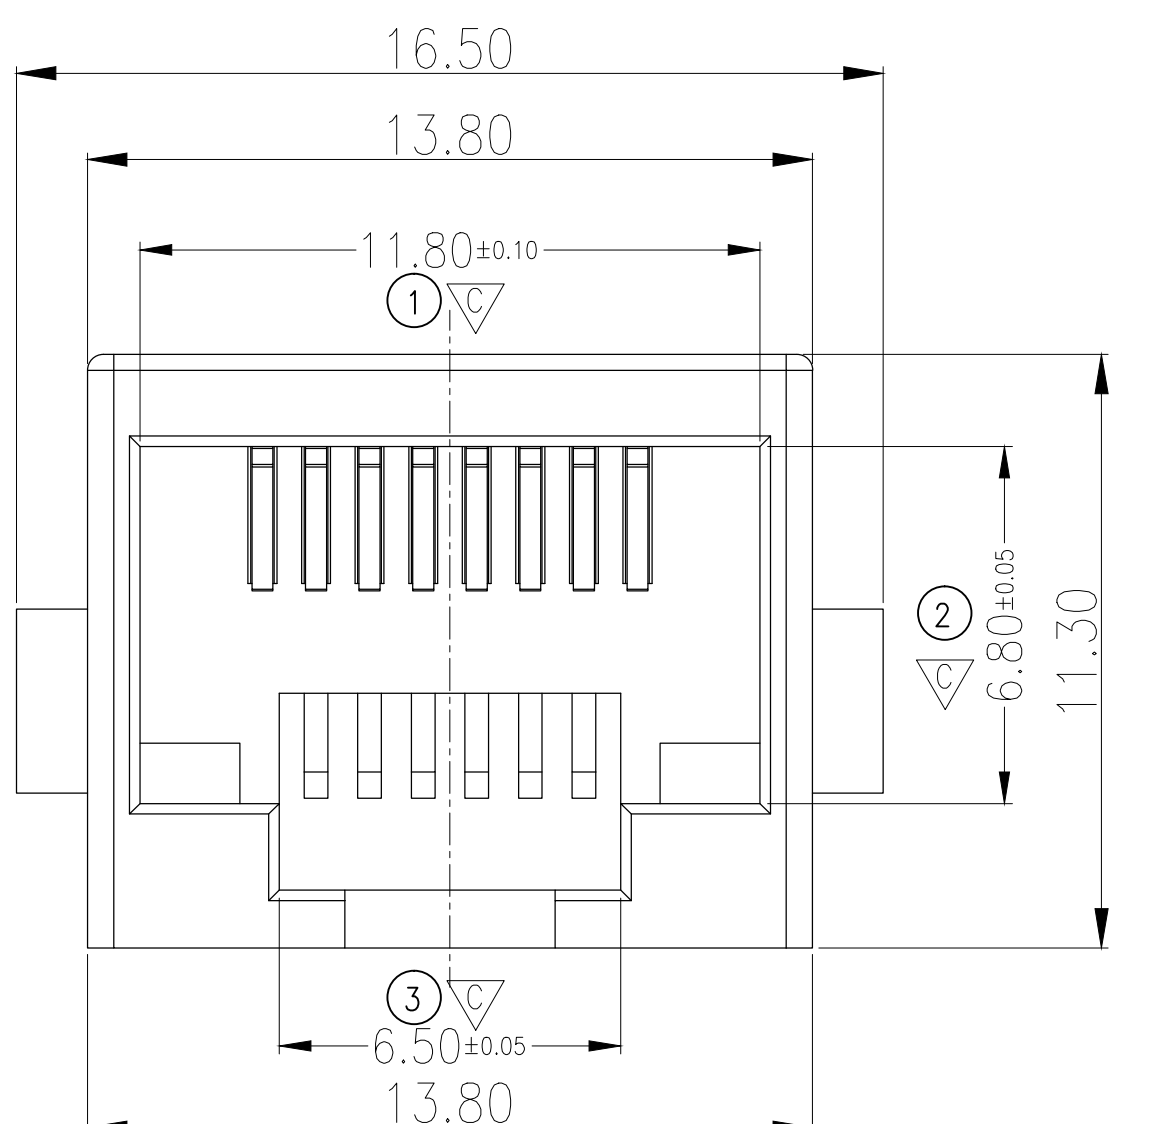
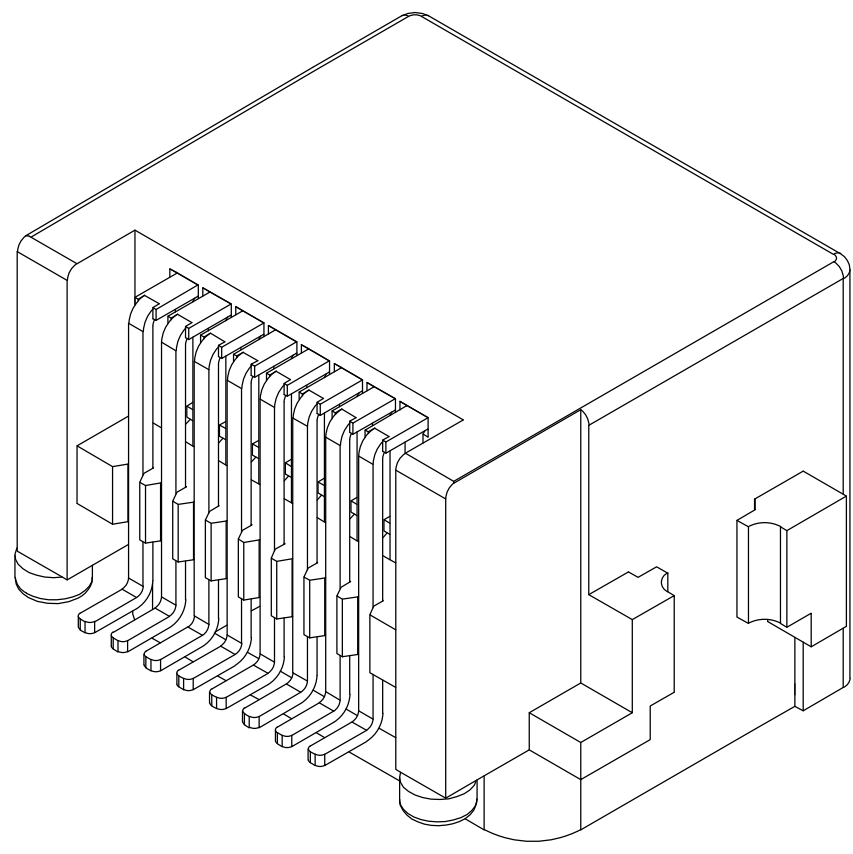
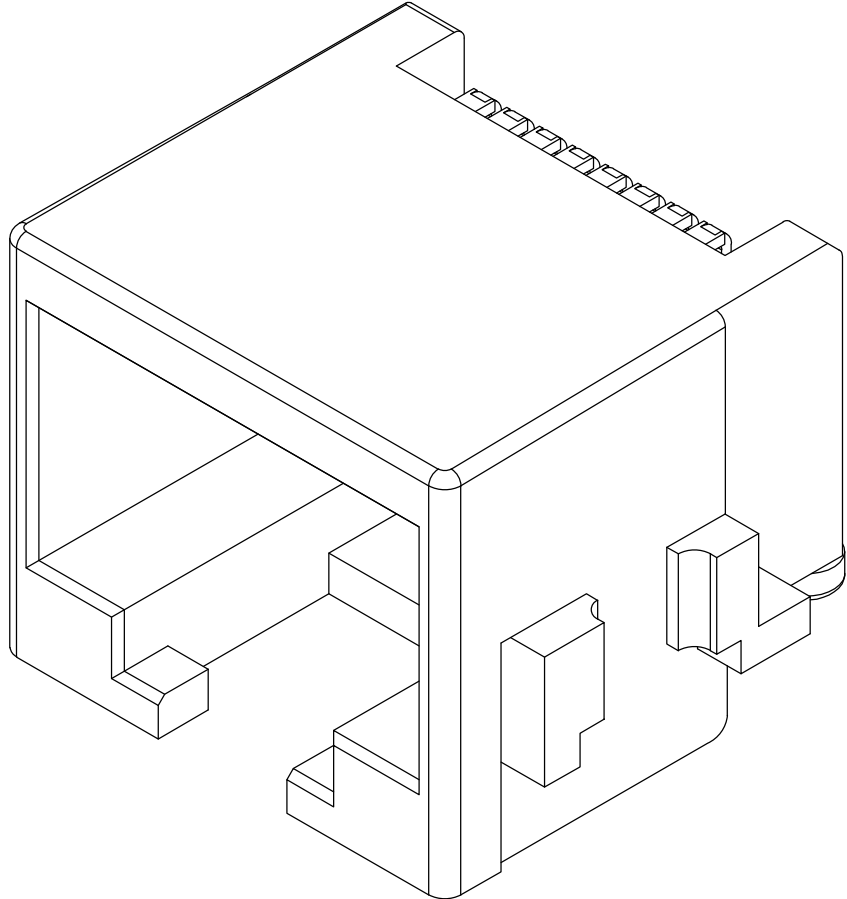


Autodesk

Autodesk

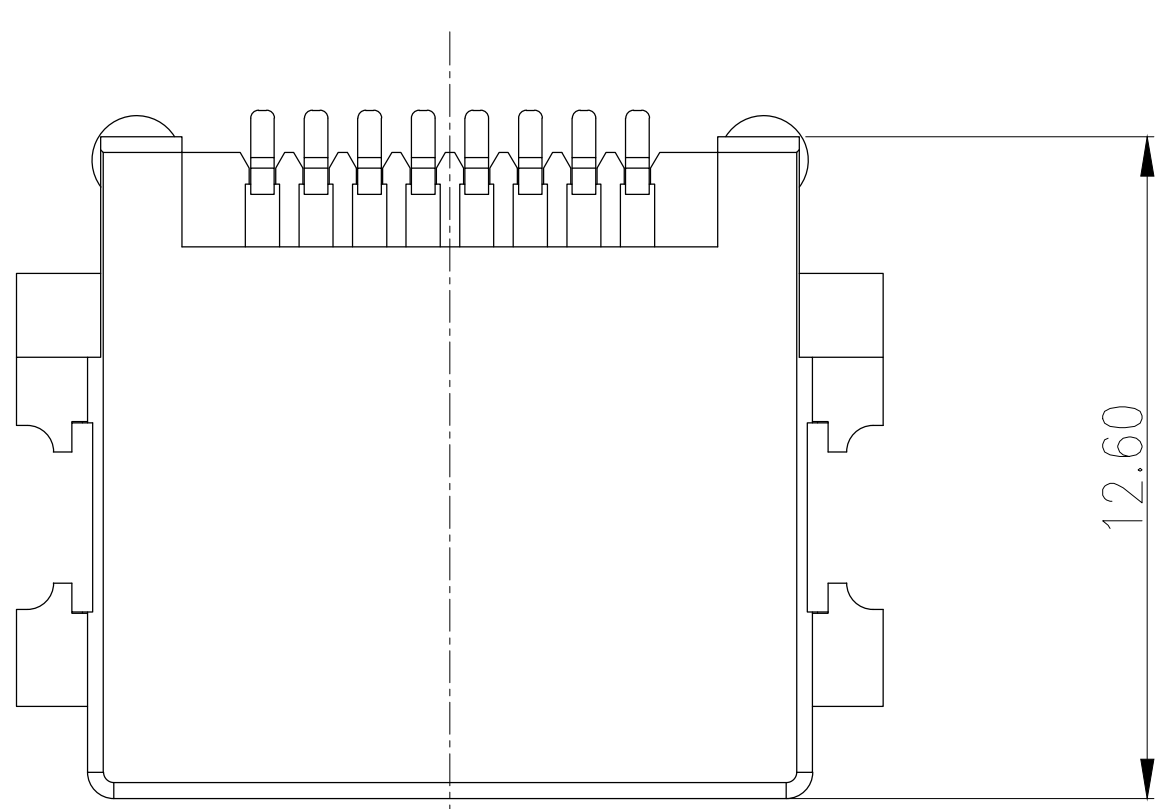


- 说明:
1. 材质:
胶芯:LCP,UL94V-0; COLOR; BLACK
端子: COPPER ALLOY
外壳: LCP
 2. 电镀说明:
端子: 接触区域镀金G.F
焊锡区域镀锡
全部区域镍底
外壳: 表面镀镍
 3. 性能说明:
1) 电压: 150V AC RMS.
2) 额定电流: 1.5A.
3) 接触电阻: 40mΩ Max.
4) 绝缘电阻: 500MΩ MIN.
5) 绝缘耐压: 1000V AC.
6) 工作温度: -40° C TO +80° C.
7) 耐久性: 500 Mating Cycles MIN.

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名:
DRAWIGN	MISS LI	ANIT	MM		X. ±0.30	X.XX ±0.10	网口连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.20	X. °±1.00°	型号:
APPROVAL		VERSION	01				RJ45沉板8.45mm全塑 SMT




东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co.,Ltd.

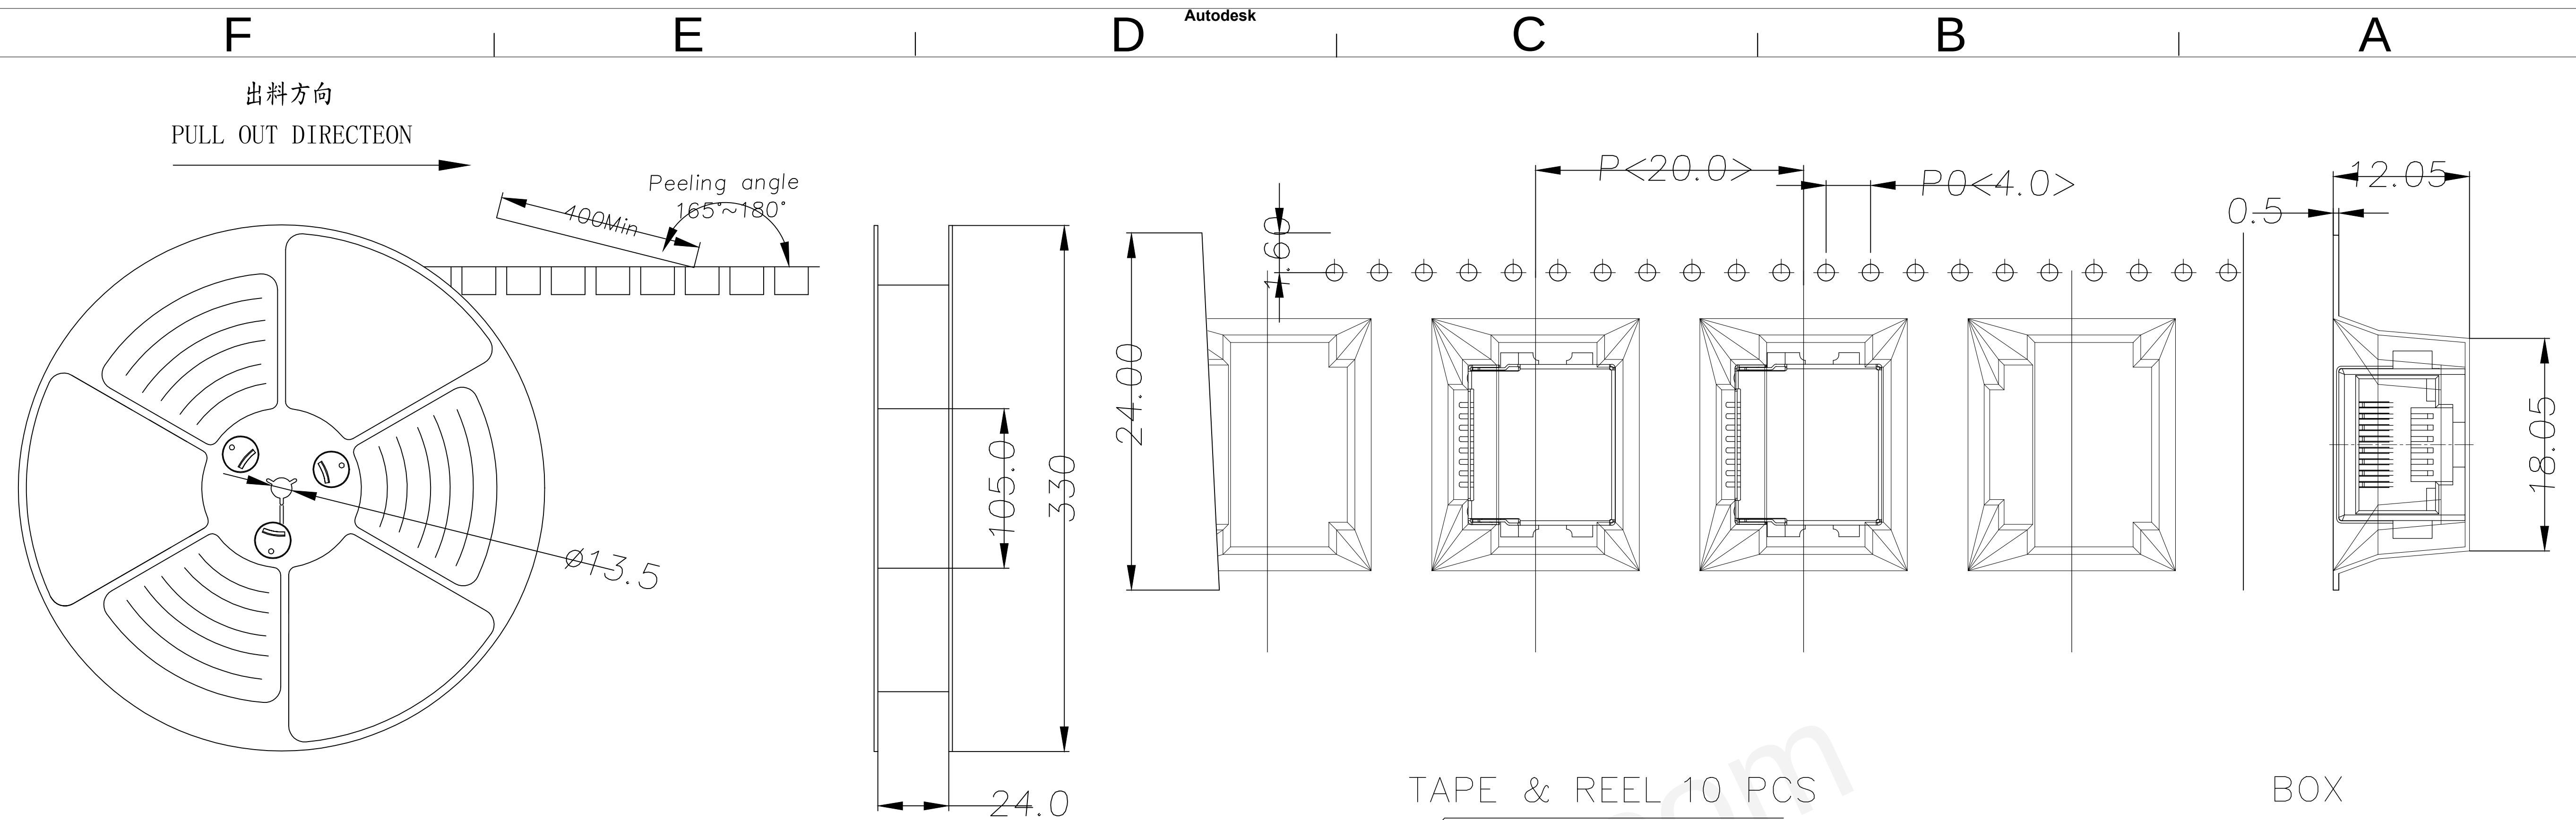


NOTES

- 1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

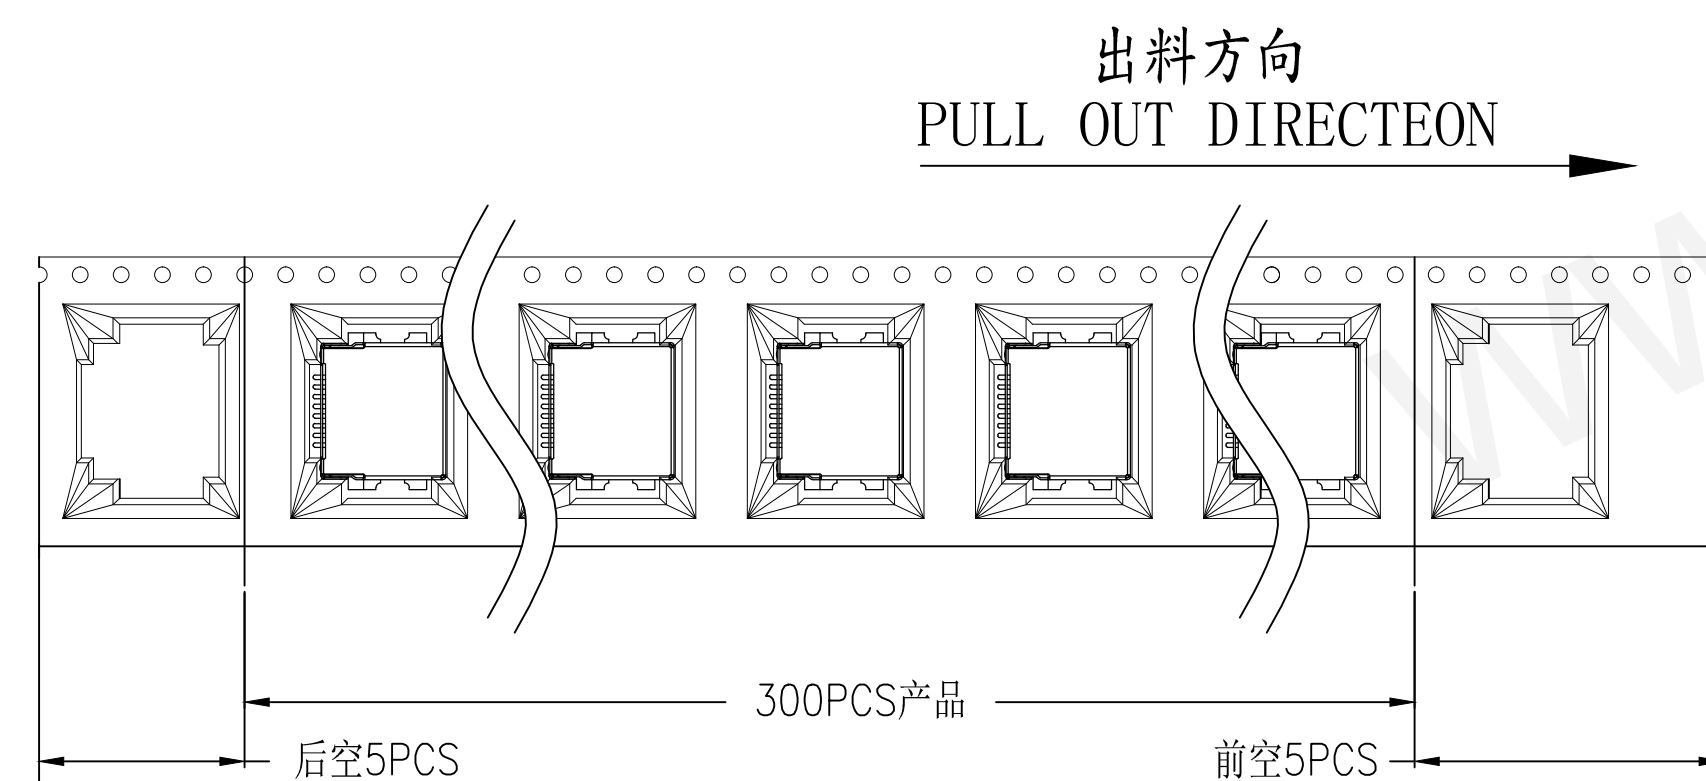

- 2.上帶剝力力為：0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

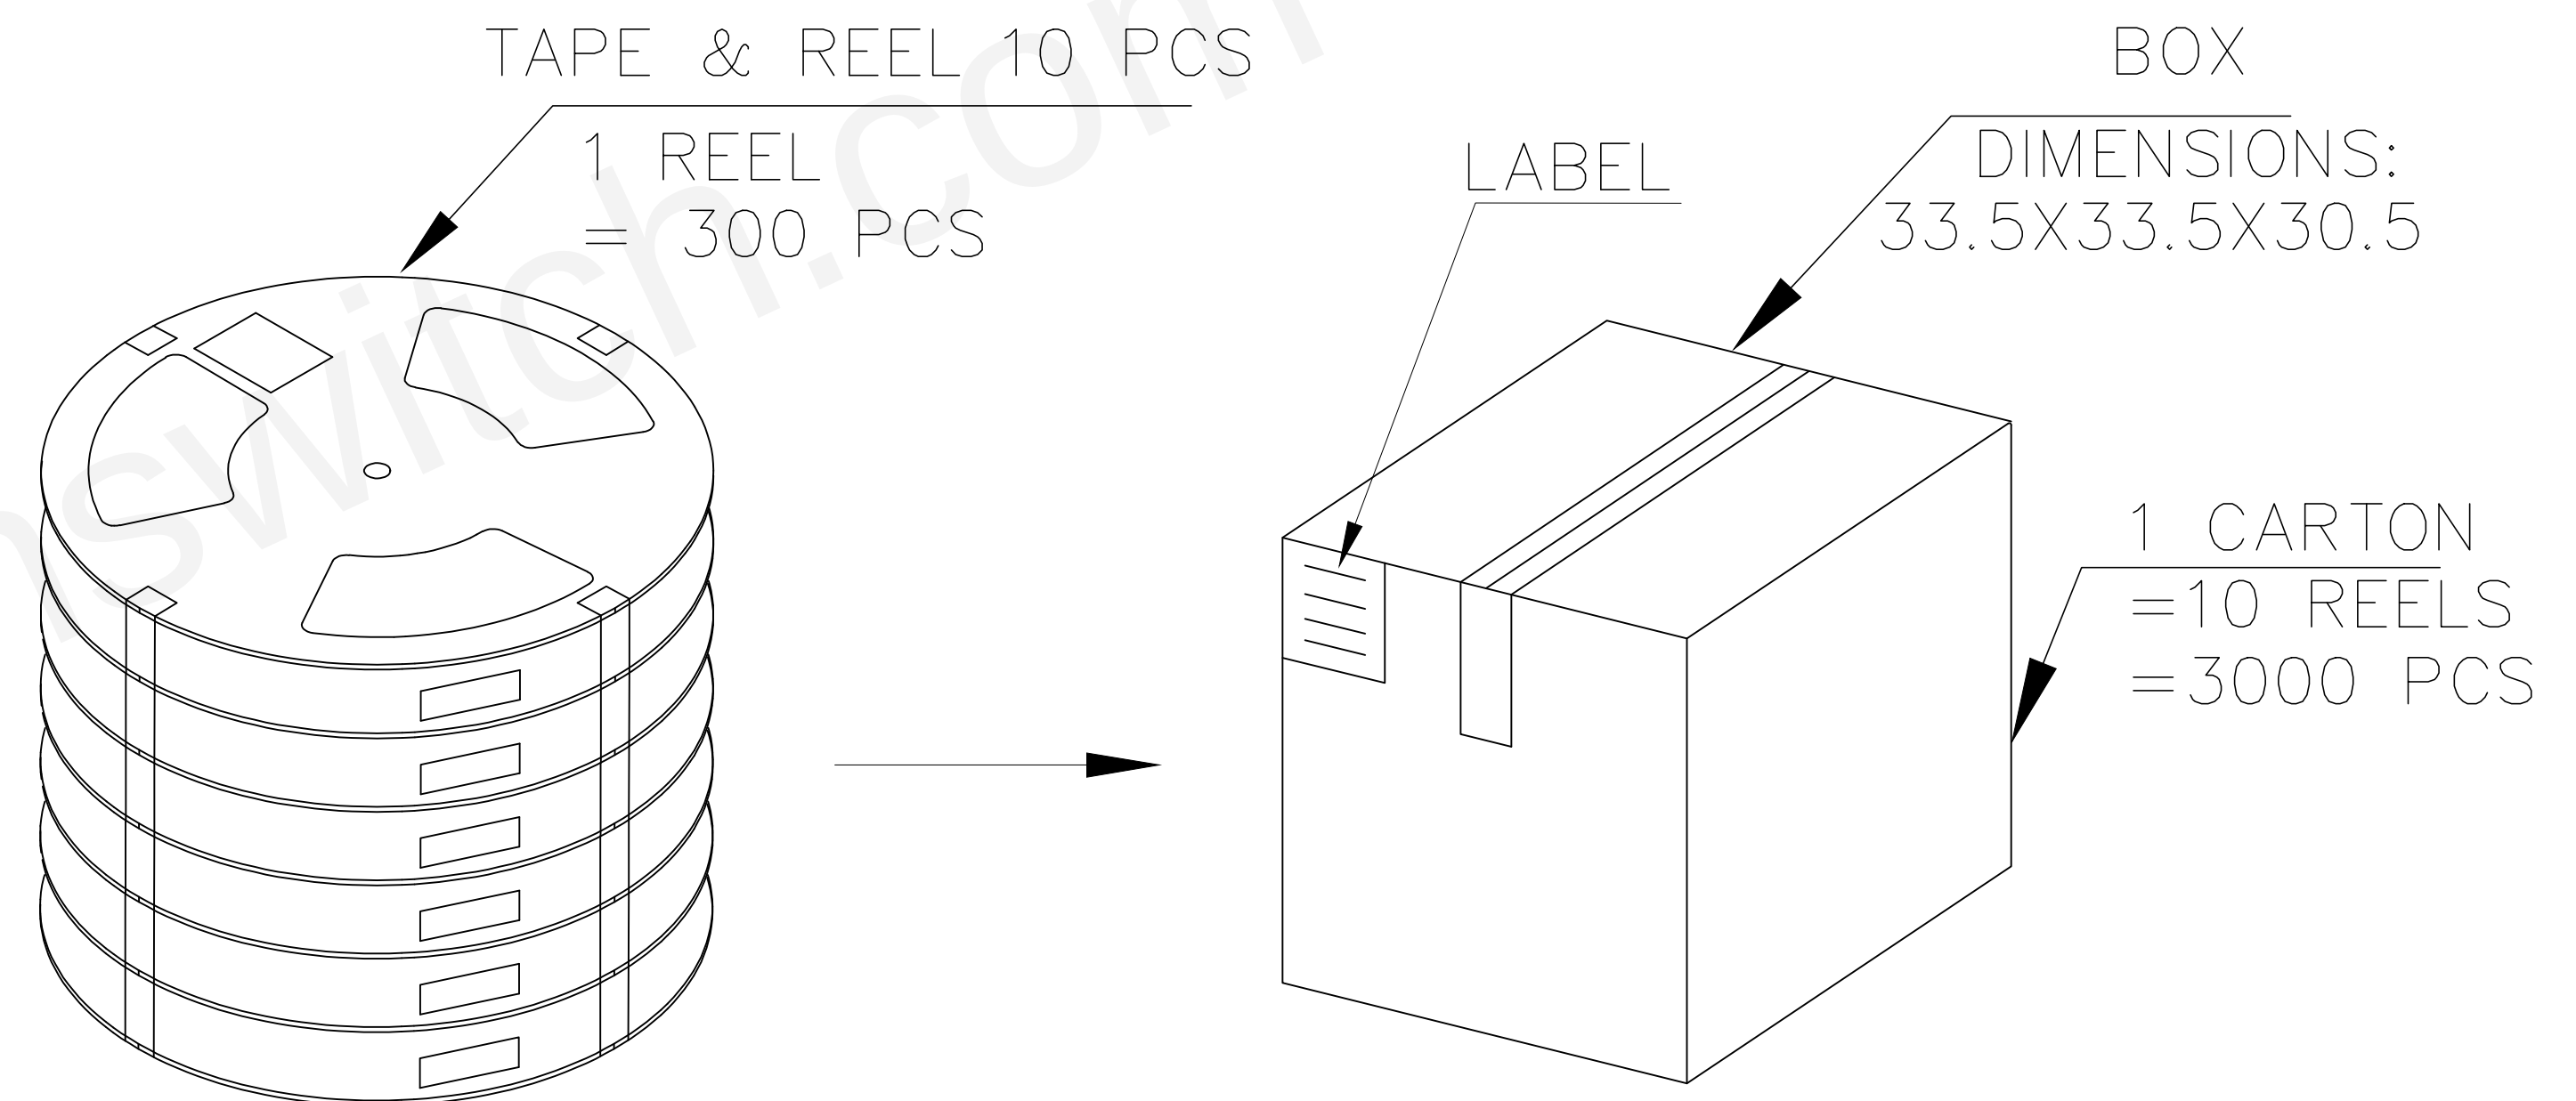

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 网口连接器	 东莞市航宏电子科技有限公司 Dongguan Hanghong Electronics Co.,Ltd.
DRAWIGN	MISS LI	ANIT	MM		X. ±0.30	X.XX ±0.10		
CHECK	Mr. ZENG	SIZE	A4: 210*297	X. X ±0.20	X. °±1.00°	型号: RJ45沉板8.45mm全塑 SMT		
APPROVAL		VERSION	01					

