

F

E

D

C

B

A

5.50

2.75

1.25
0.75
0.25

Ø0.40

7.50±0.10

4-0.70

2-0.50

6.80

8.94

4-1.35

4.30

3.60

0.30

4.80

0.50
1.50
2.50
5.50
6.69^{+0.055}_{-0.045}8.34^{+0.06}_{-0.02}

2.56±0.04

A1/A12

A12/A1

B12/B1

B1/B12

0.73

1.24

NOTE:

1.MATERIAL SPECIFICATION:

- 1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
- 2.CONTACTS:COPPER ALLOY
- 3.MID PLATE: STAINLESS STEEL
- 4.SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:

2-1.CONTACTS:

- Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA

2-2. SHELL:

- Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE,

- 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
- 4-1. CURRENT RATING: 5A
VOLTAGE RATING: 20V
 - 4-2.INSULATION RESISTANCE: 100MΩ MIN
 - 4-3.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 - 4-4.LOW CONTACT RESISTANCE: INITIAL 40mΩ, AFTER 50mΩ

5. ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -30°C~+80°C.
THE PEAK TEMPERATURE ON THE BOARD SHALL

6.IR REFLOW:

- BE MAINTAINED FOR 10 SECONDS AT 260°C.

5	CAP	LCP UL94V-0	BLACK	1PCS
4	OUTER SHELL	SUS304 T=0.30MM	NI 30u"MIN	1PCS
3	SHIELDING PLATE	SUS301 T=0.15MM	N/A	1PCS
2	CONTACT	C2680 T=0.15MM	Mating area 1u"Au Solder Tails:G/F Underplate: 50u"Min Ni overall	2SET
1	INSERT MOLDING	LCP UL94V-0	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE	
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X. ±2°
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25	
APPROVAL		VERSION	01		X.XX ±0.15	

品名:


连接器

型号:

TYPE-C 16P立贴6.8H无弹大脚 (脚长1.35)




东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co.,Ltd.

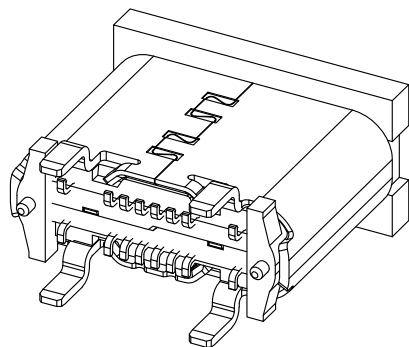

USB TYPE-C PIN ASSIGNMENTS


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

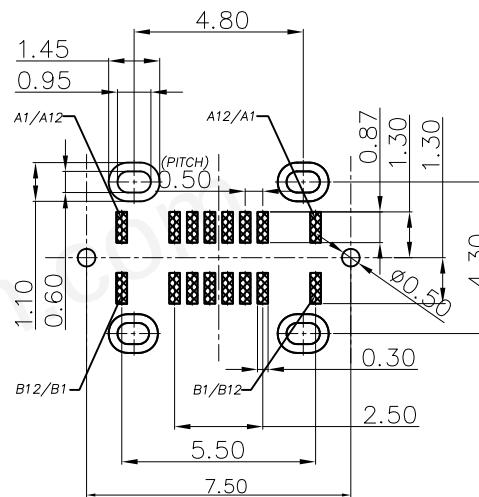

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

DESIGN	MISS ZENG	SC ALL			未注公差 T0OLERANCE		品名:	连接器
DRAWIGN	MISS LI	ANIT	MM		X. ± 0.35	X. $\pm 2^\circ$	型号:	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ± 0.25		TYPE-C 16P立贴6.8H无弹大脚(脚长1.35)	
APPROVAL		VERSION	01		X.XX ± 0.15			

 东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

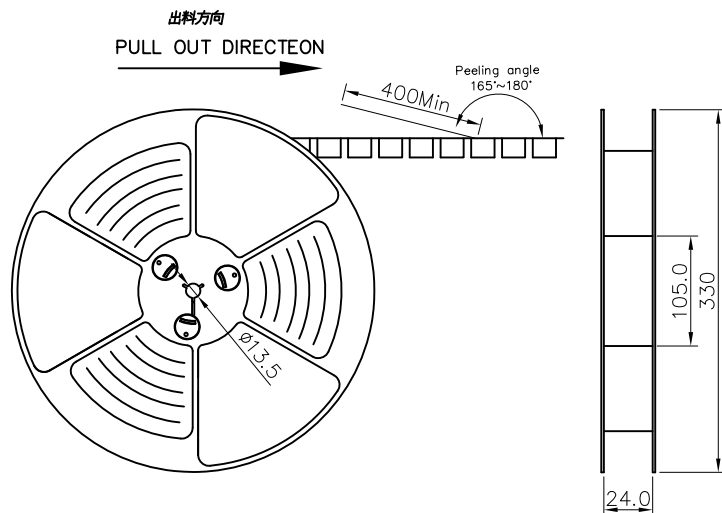


NOTES

1.帶子引導長度

LEAD TAPE LENGTH

出料方向
PULL OUT DIRECTEON

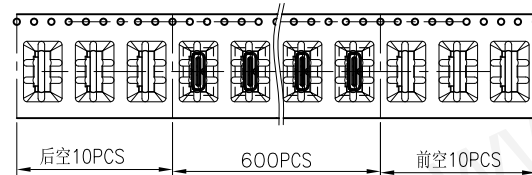

2.上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)

出貨運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:

卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

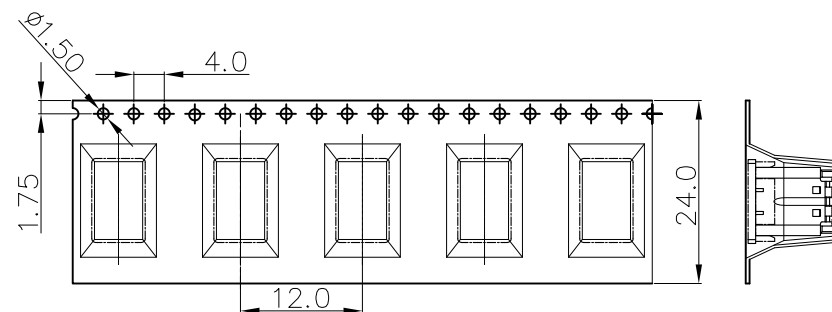

TAPE & REEL 10 PCS

1 REEL
= 600 PCS

BOX

DIMENSIONS:
33.5X33.5X30.5

LABEL

1 CARTON
=10 REELS
=6000 PCS

包裝明細表 (The detail of the packing)

產品料號 (Product No.)		包裝容量 (Packing Capacity)			重量 Weight (Kg)		
		pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
		600	10	6000	----	----	----
DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 连接器
DRAWIGN	MISS LI	ANIT	MM				
CHECK	Mr. ZENG	SIZE	A4: 210*297		X.X ±0.25		
APPROVAL		VERSION	01		X.XX ±0.15		



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.

品名:

连接器

型号:

TYPE-C 16P立贴6.8H无弹大脚 (脚长1.35)