



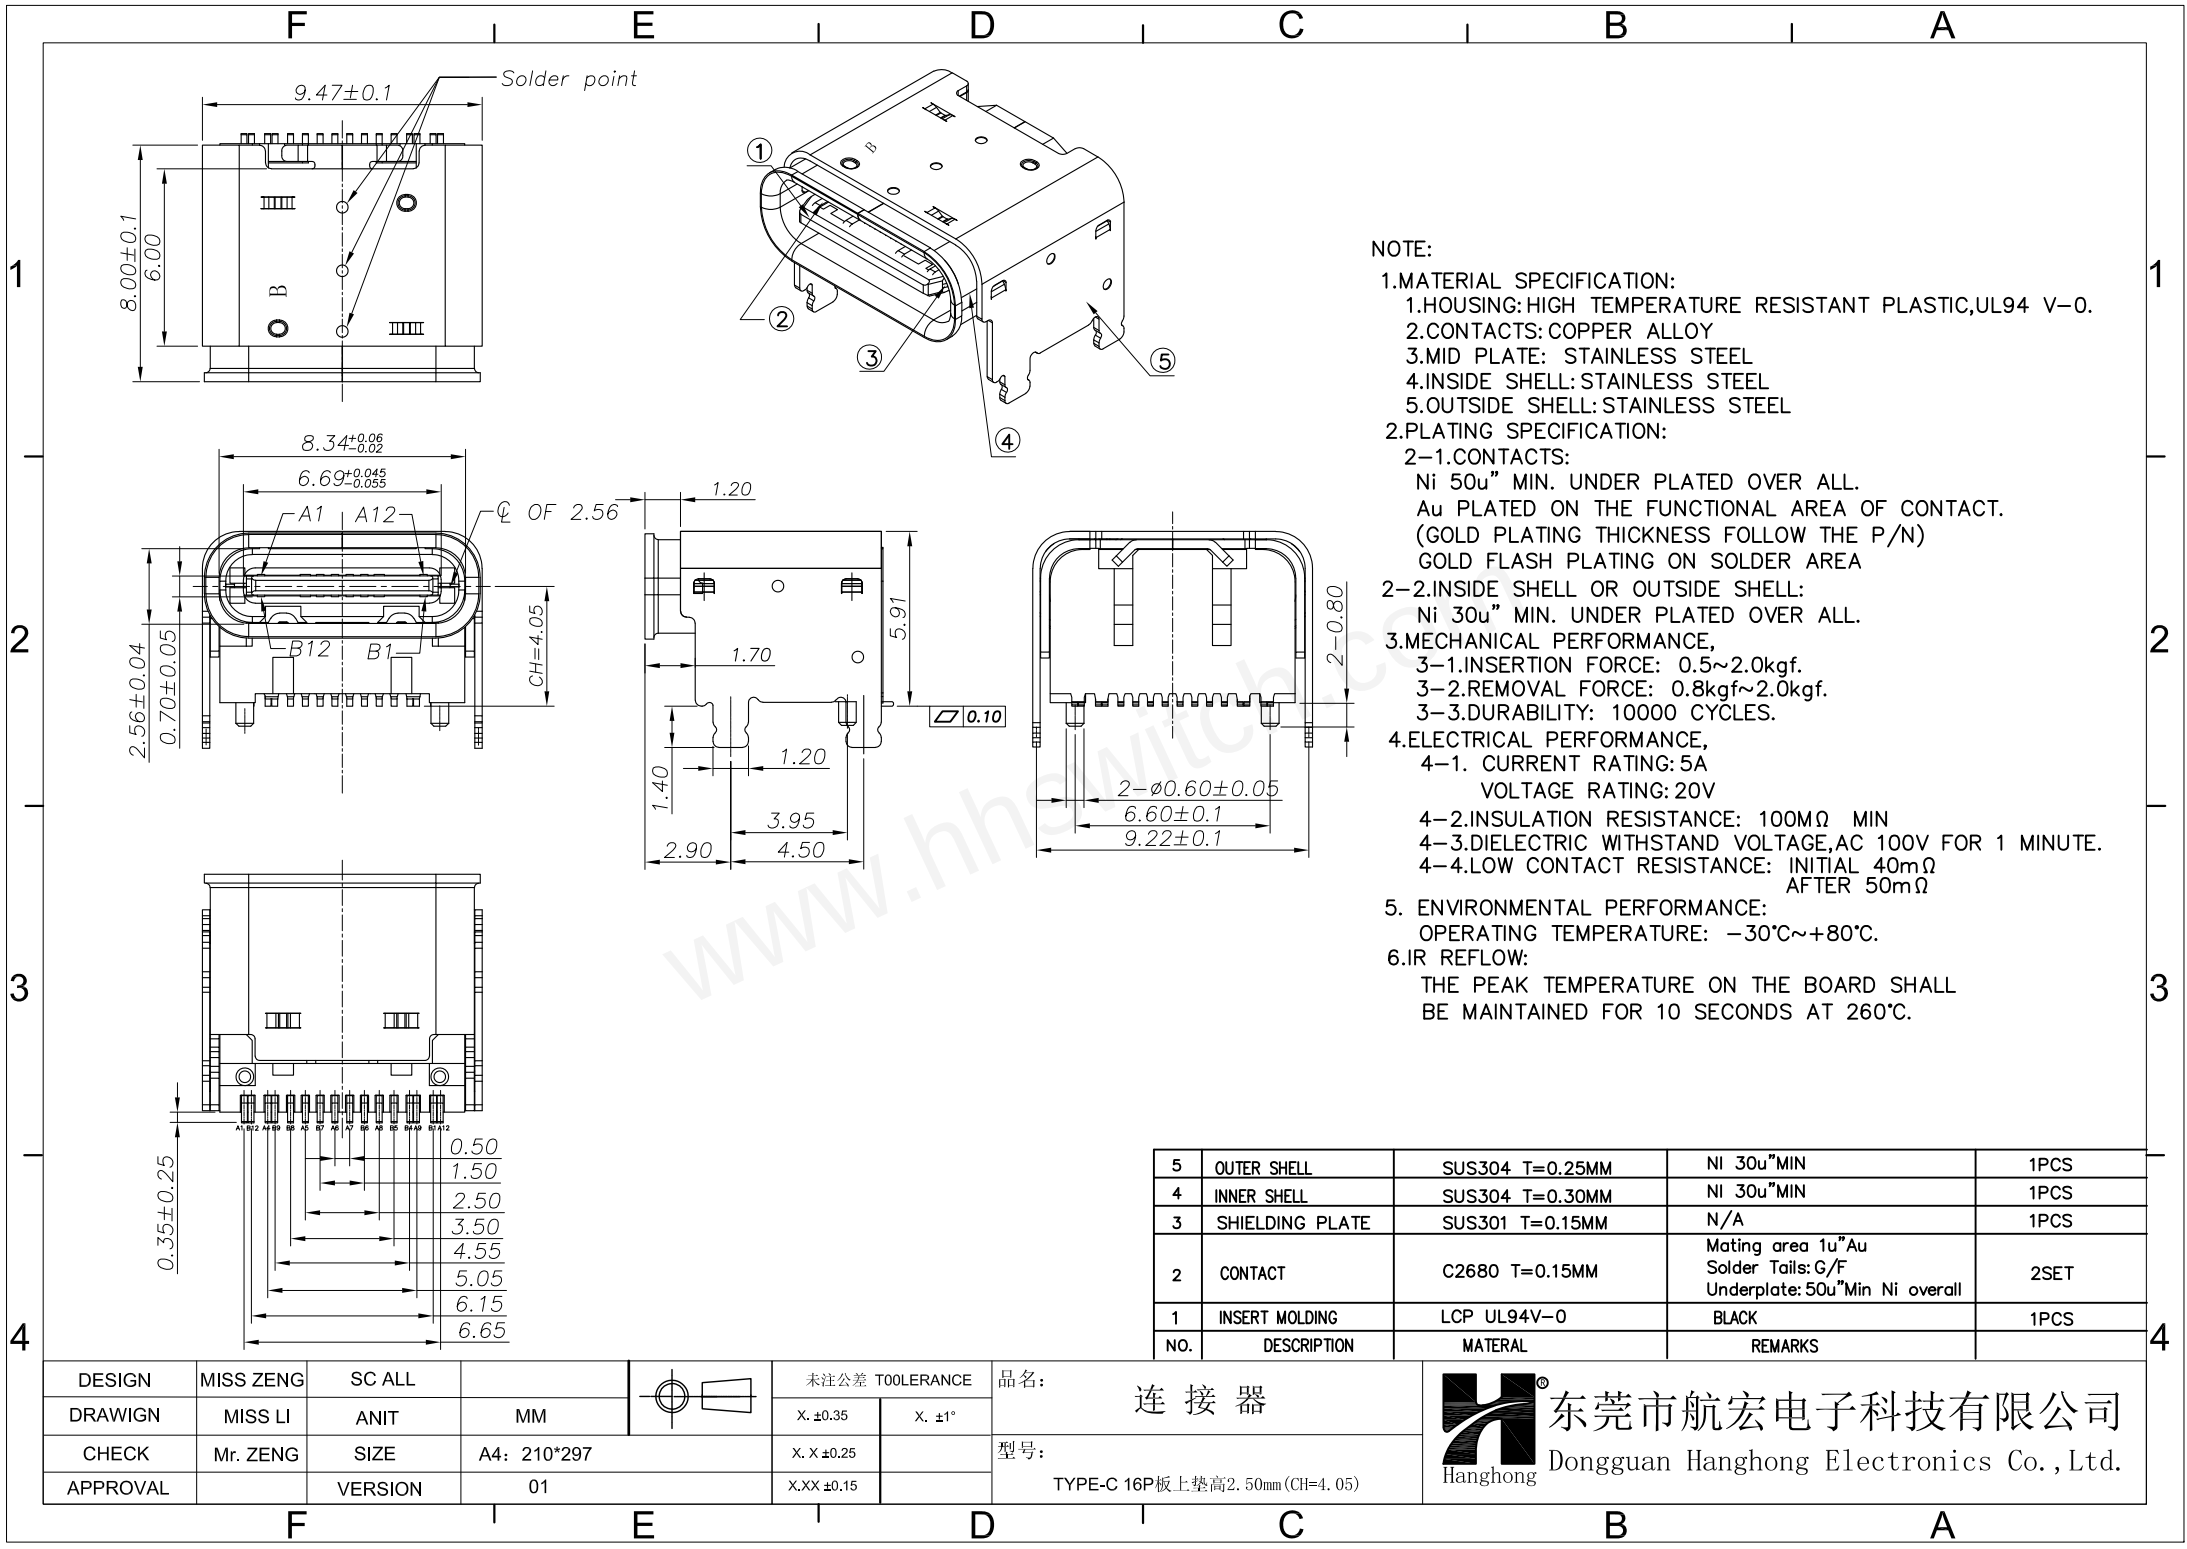


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

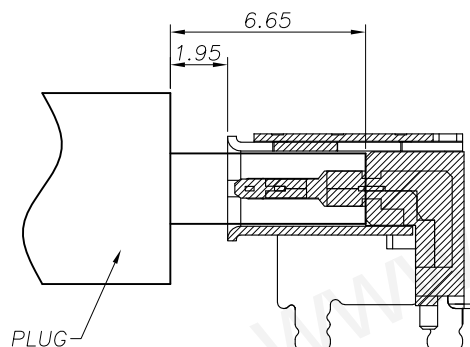


AFTER MATING
SCALE 1:1


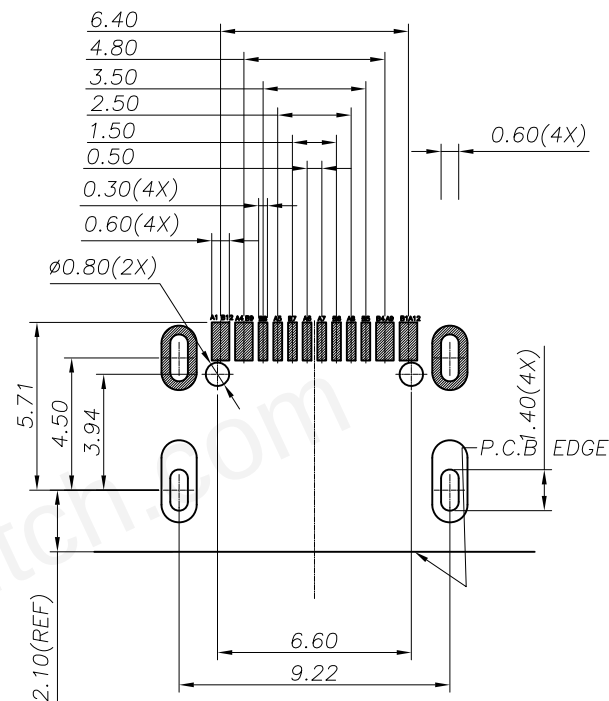


RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名:
DRAWIGN	MISS LI	ANIT	MM		X. ± 0.35	X. $\pm 1^\circ$	连接器
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ± 0.25		型号:
APPROVAL		VERSION	01		X.XX ± 0.15		TYPE-C 16P板上垫高2.50mm(CH=4.05)

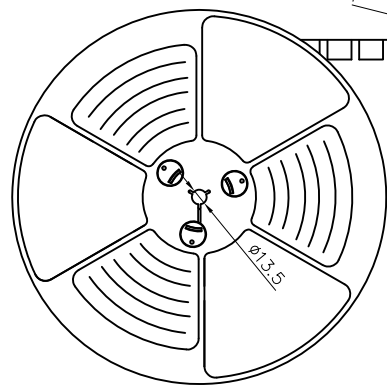

出料方向
PULL OUT DIRECTEON

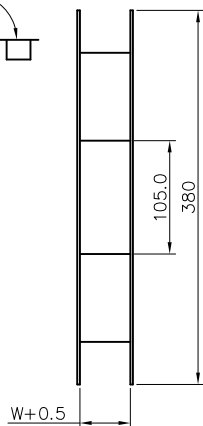

NOTES

1.帶子引導長度


LEAD TAPE LENGTH

出料方向

PULL OUT DIRECTEON

出料方向

PULL OUT DIRECTEON

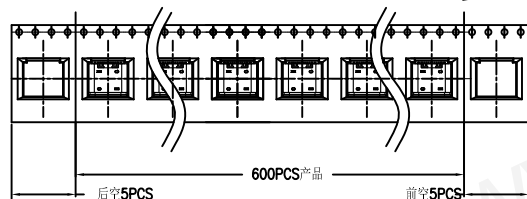

2.上帶 剥离力為: 0.1~1.3N(10.2gf~130gf)


PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)

出貨'運輸過程中一定注意:

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT:


卷帶在運輸過程中不能散開

PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

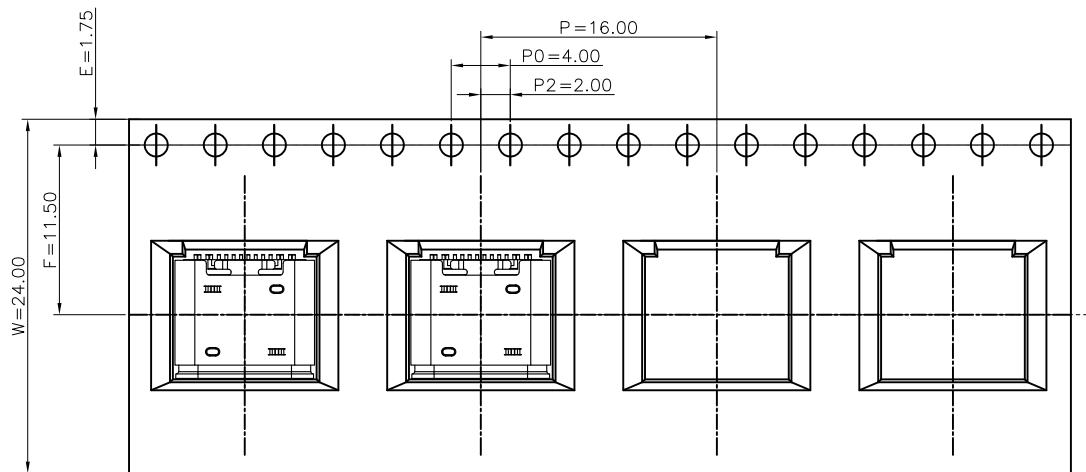


TAPE & REEL 7 PCS

1 REEL
= 600 PCS



BOX

DIMENSIONS:
39.5X39.5X20

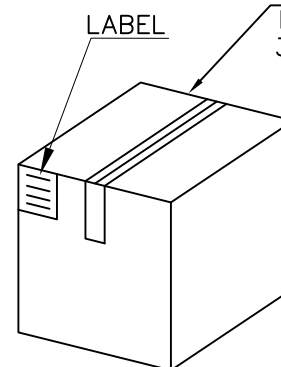

1 CARTON
=6 REELS
=3600 PCS

包裝明細表 (The detail of the packing) Carton

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxes/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
	600	6	3600	----	----	----

DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 连接器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.35	X. ±1°	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.25		型号: TYPE-C 16P板上垫高2.50mm (CH=4.05)
APPROVAL		VERSION	01		X.XX ±0.15		



东莞市航宏电子科技有限公司

Dongguan Hanghong Electronics Co.,Ltd.