


- NOTES:
- 1.MATERIAL:
- 1-1 HOUSING:LCP WITH 30% G/F UL 94V-0 COLOR:BLACK.
- 1-2 CAP:LCP WITH 30% G/F UL 94V-0 COLOR:BLACK.
- 1-3 TERMINAL:COPPER ALLOY T=0.20mm
- 1-4 SHELL:SPCC/COPPER ALLOY T=0.50mm
- 2.PLATING:
- 2-1 TERMINAL:
- (SEE P/N.)GOLD PLATED ON CONTACT AREA AND 100μ" MIN. MATTE-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 80μ" MIN.NICKEL.
- 2-2 SHELL:50μ" MIN. NICKEL PLATED.
- 3.MECHANICAL PERFORMANCE
- 3-1 INSERTION FORCE: 4.5kgf MAX
- REMOVAL FORCE: 1kgf MIN; 4.0kgf MAX
- DURABKLITY:5000 CYCLES
- 4.ELECTRICAL PERFORMANCE:
- 4-1 Current Rating: 0.5A
- 4-2 Voltage Rating: 40V AC
- 4-3 CONTACT RESISTANC:INITIAL 30mΩ MAX.
- AFTER TEST:Δ10 mΩ MAX
- 4-4 DIELECTRIC STRENGTH:UNMATED CONNECTORS APPLY 500V AC
- MATED CONNECTOR APPLY 300V AC
- 4-5 INSULATION RESISTANCE:100 MEGAOHMS MIN.(UNMATED)
- 10 MEGAOHM*S MIN.(MATED)
- 5.ENVIRONMENTAL PERFORMANCE:
- OPERATING TEMPERATURE: -25°C~+85°C
- SALT SPRAY:24H

PIN	Signal Assignment	PIN	Signal Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	Utility
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		






DESIGN	MISS ZENG	SC ALL			未注公差 T00LERANCE		品名: 连接器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.30	X.XX ±0.25	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. X ±0.15	X. °±1.00°	
APPROVAL		VERSION	01				

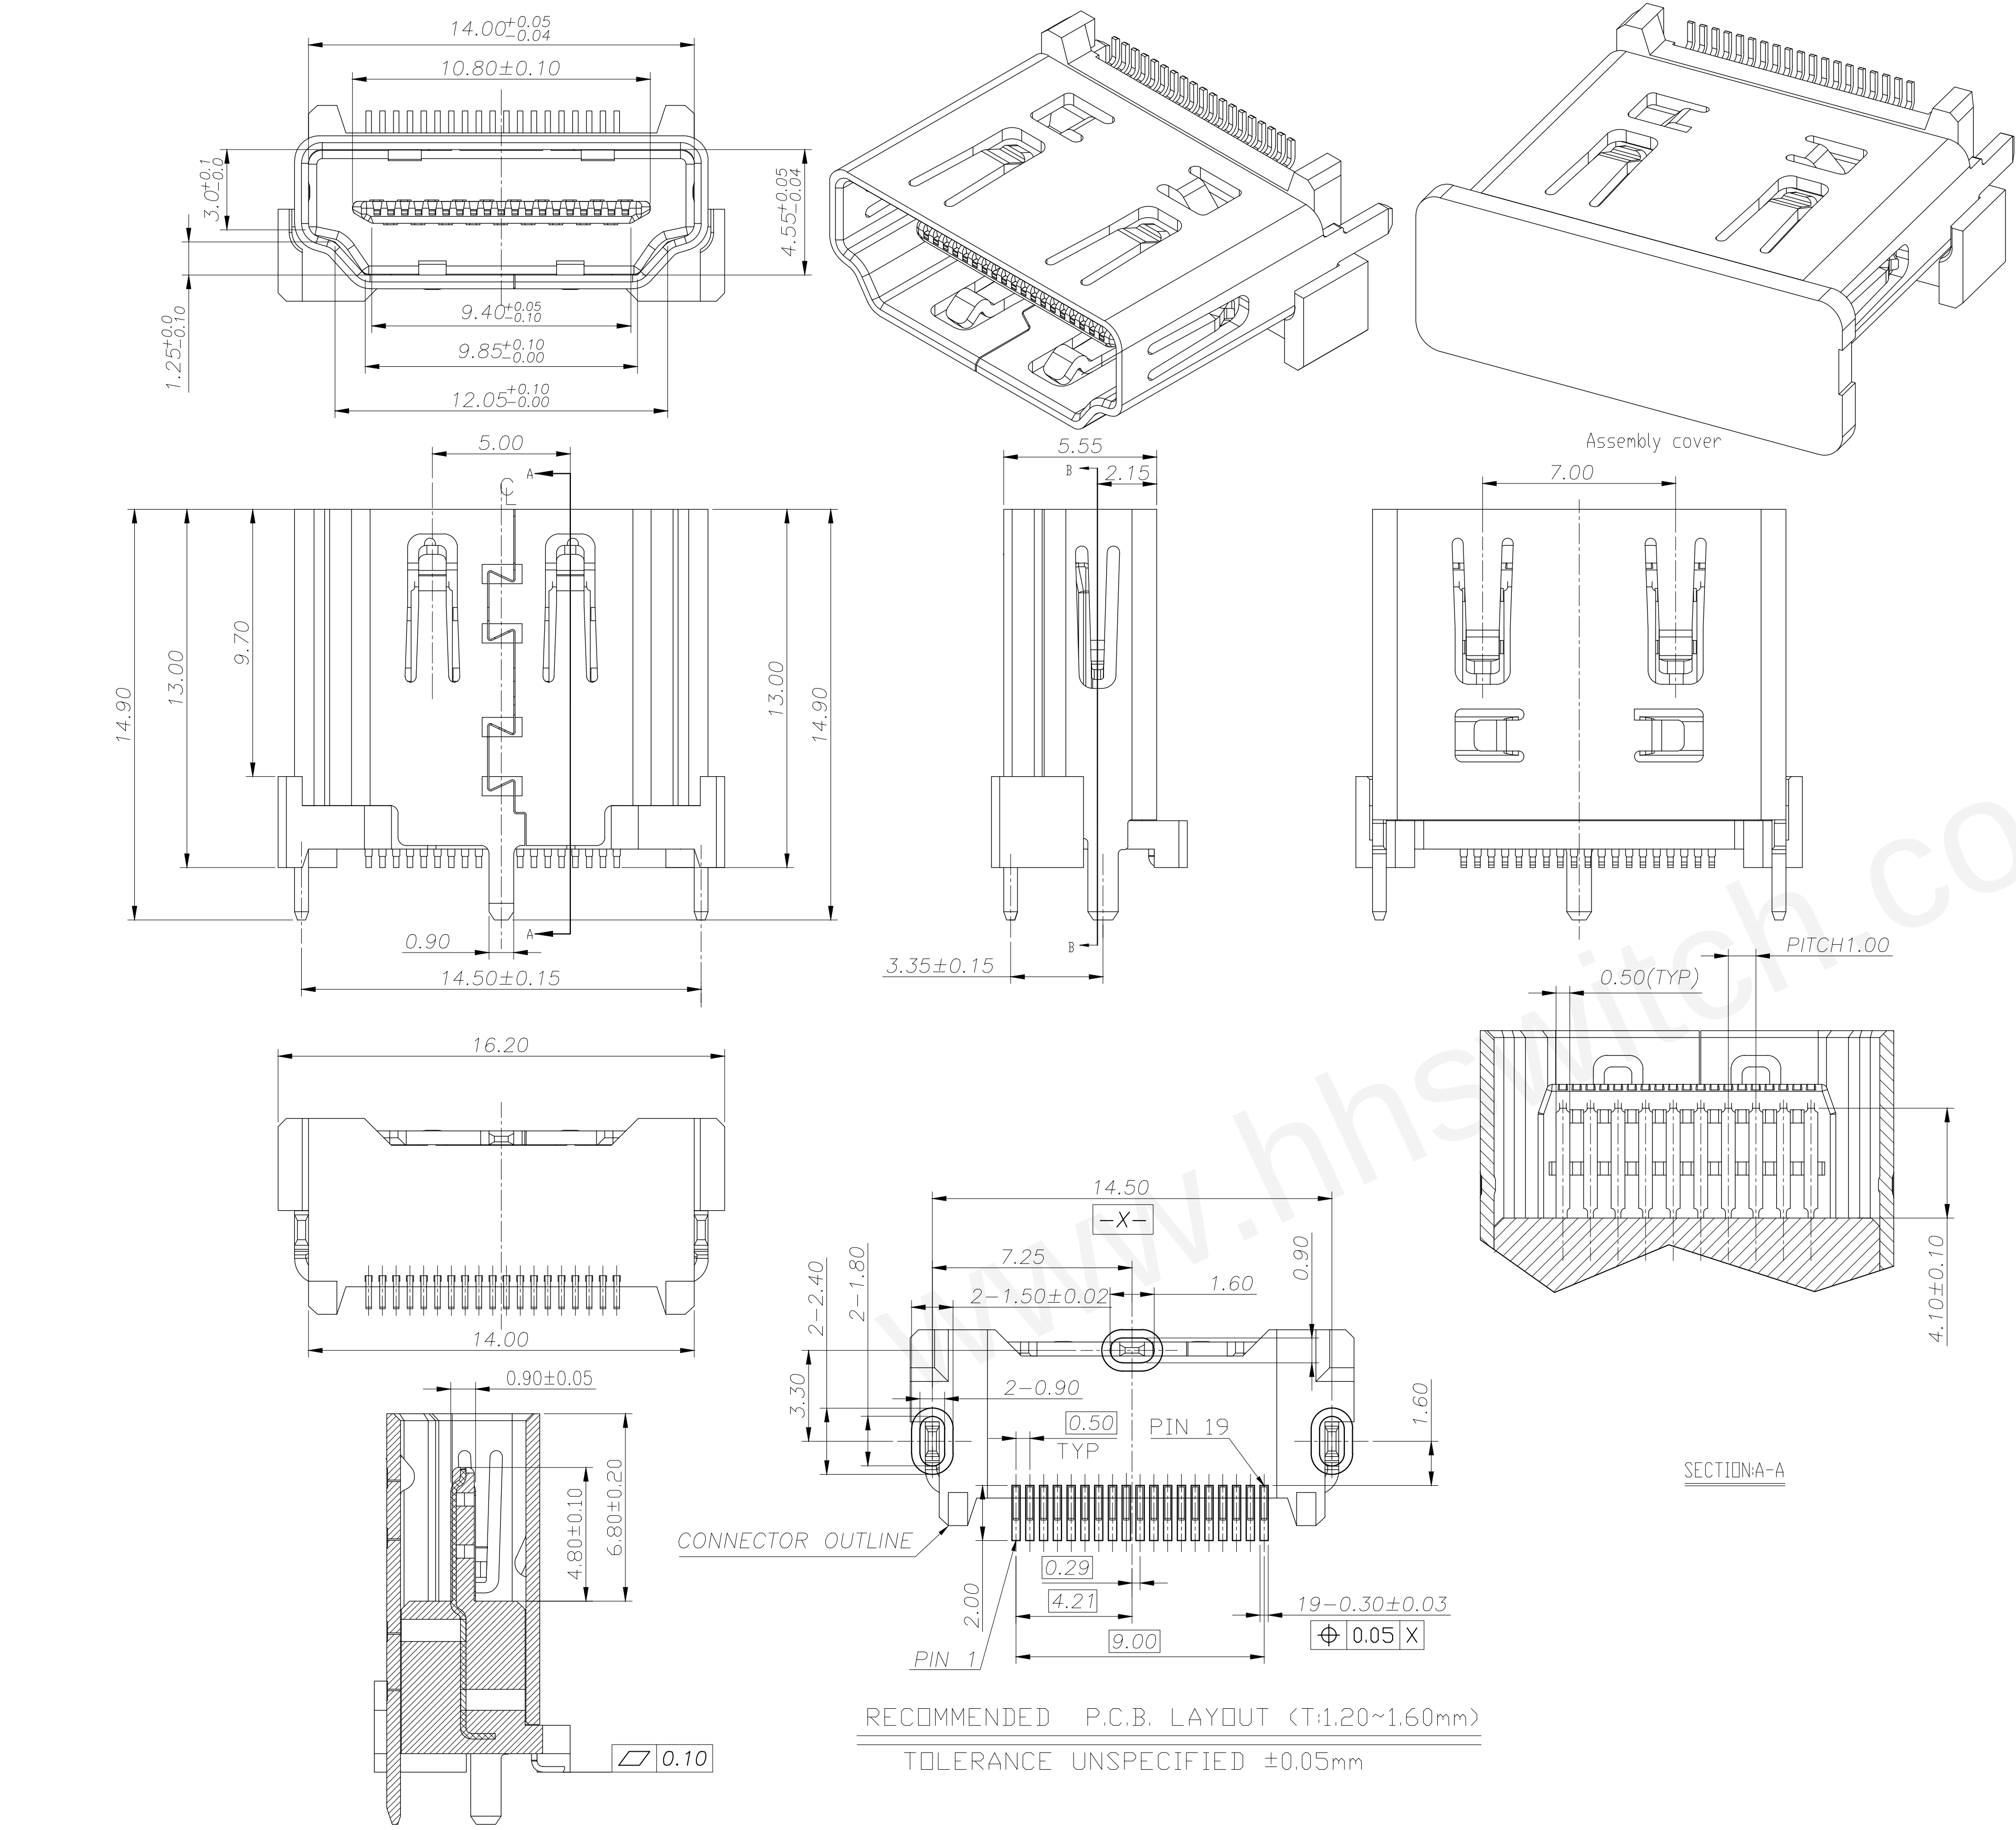


东莞市航宏电子科技有限公司

Dongguan Hanghong Electronics Co.,Ltd.

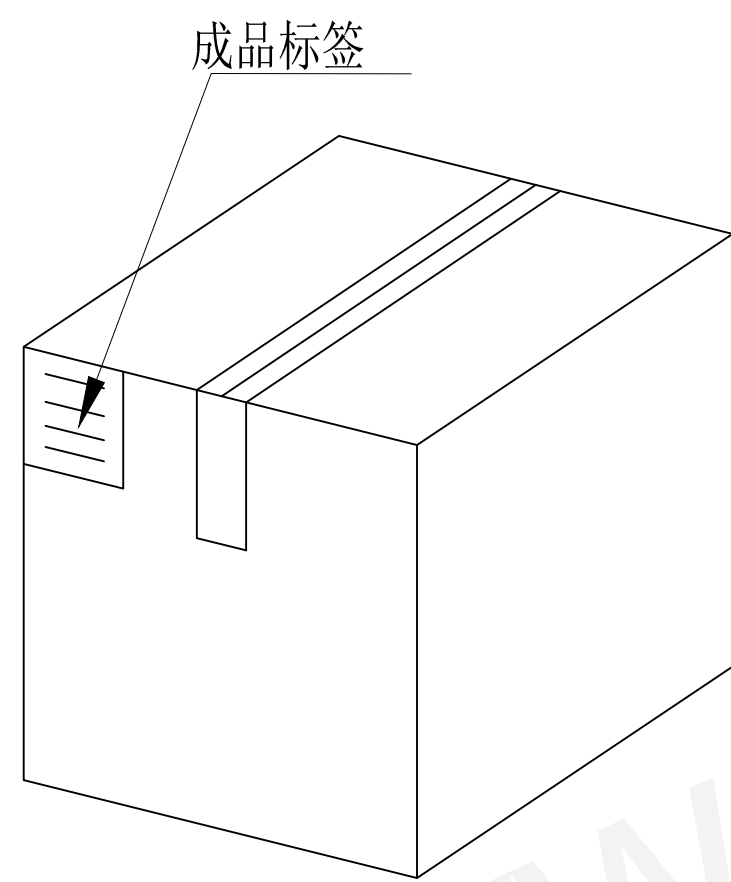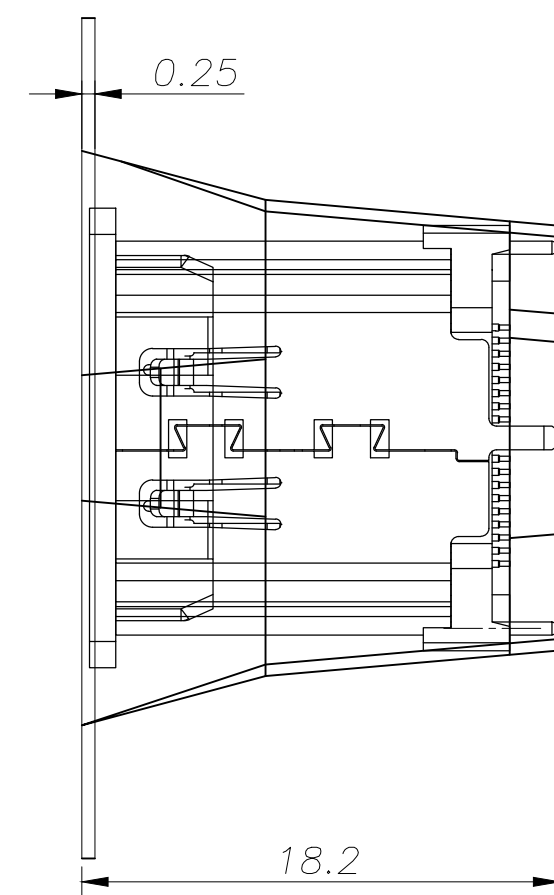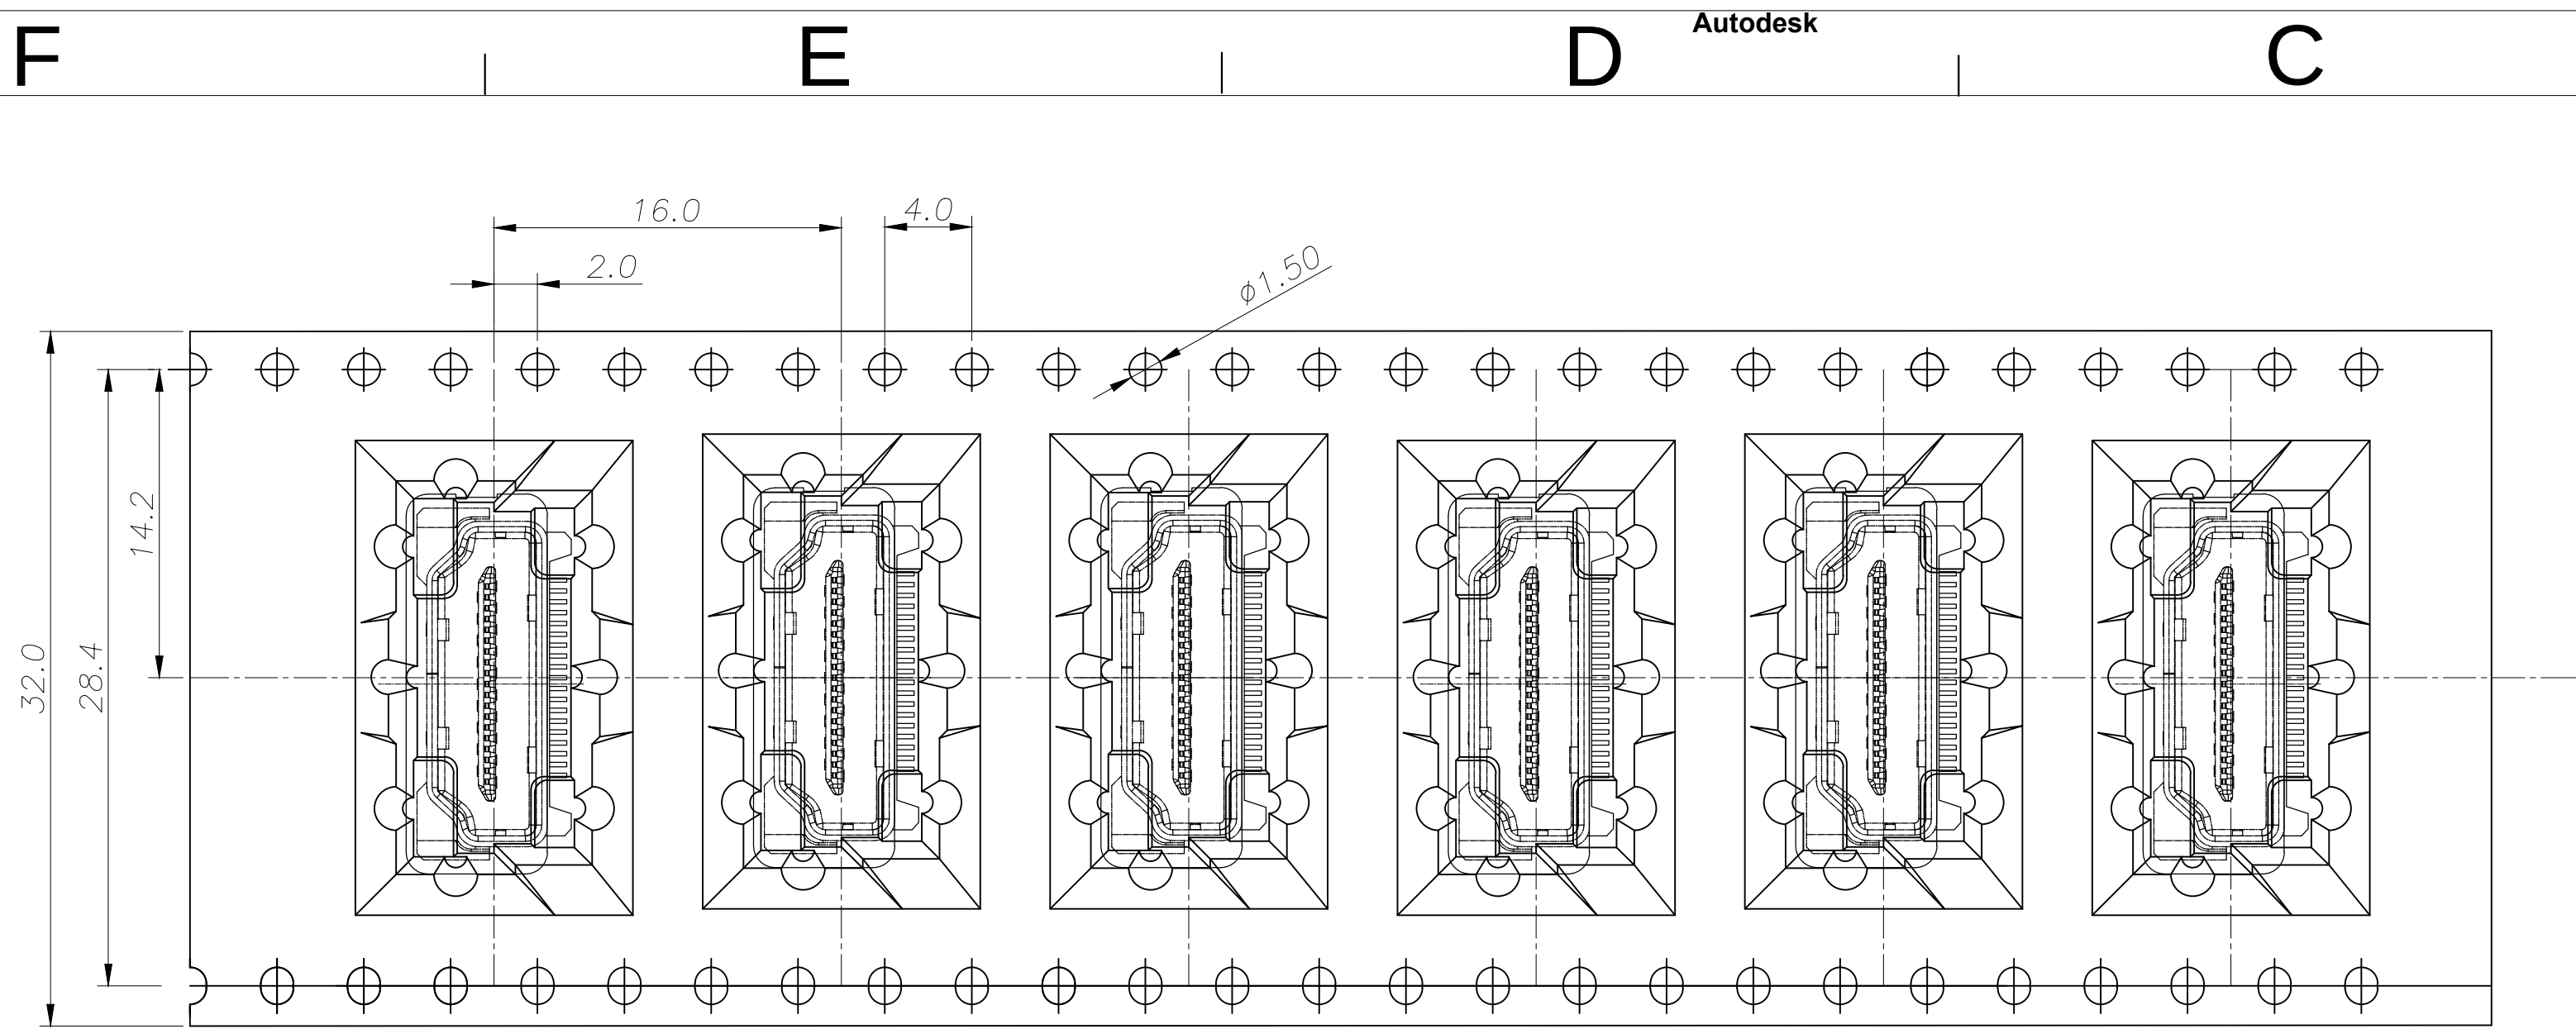


纸箱规格: 39.5*39.5*38cm

NO.4

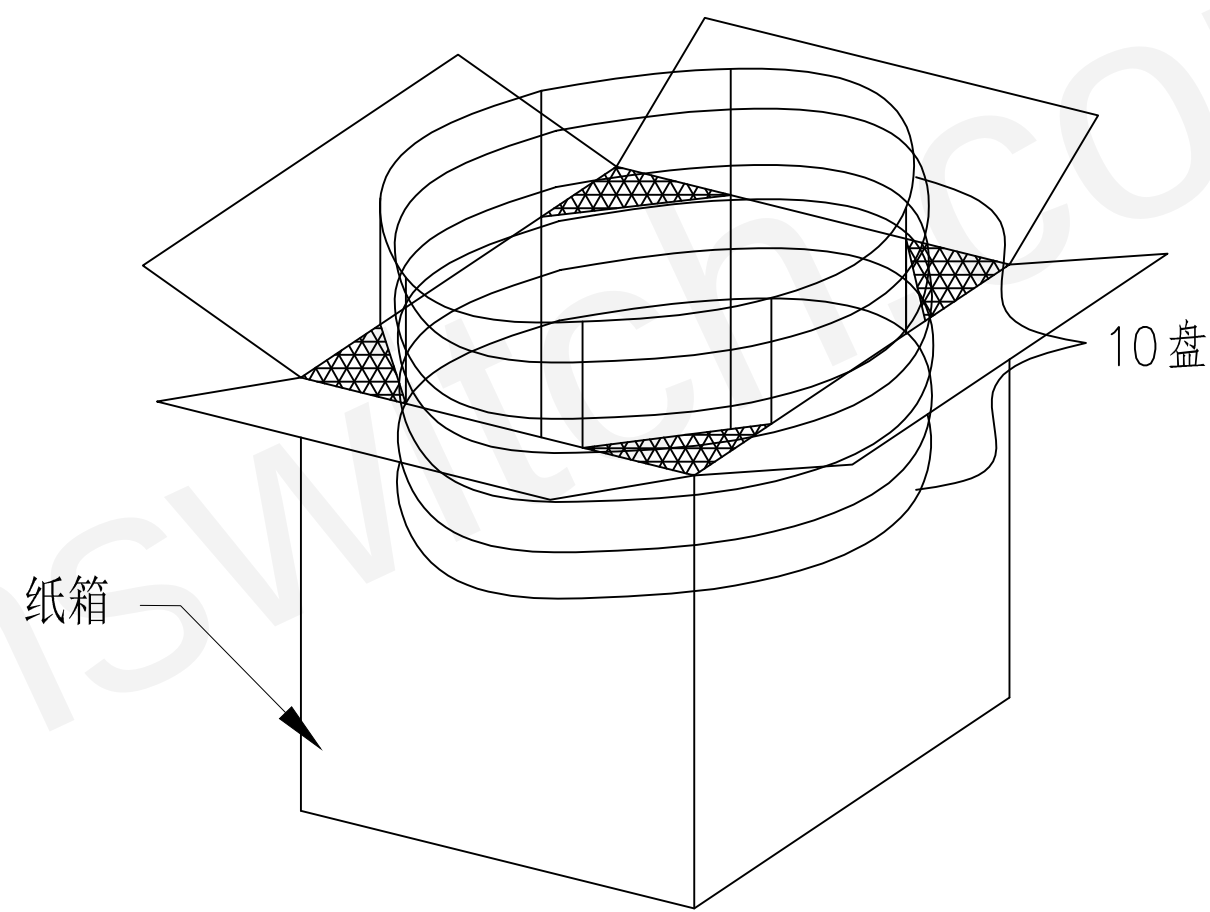

NO.3

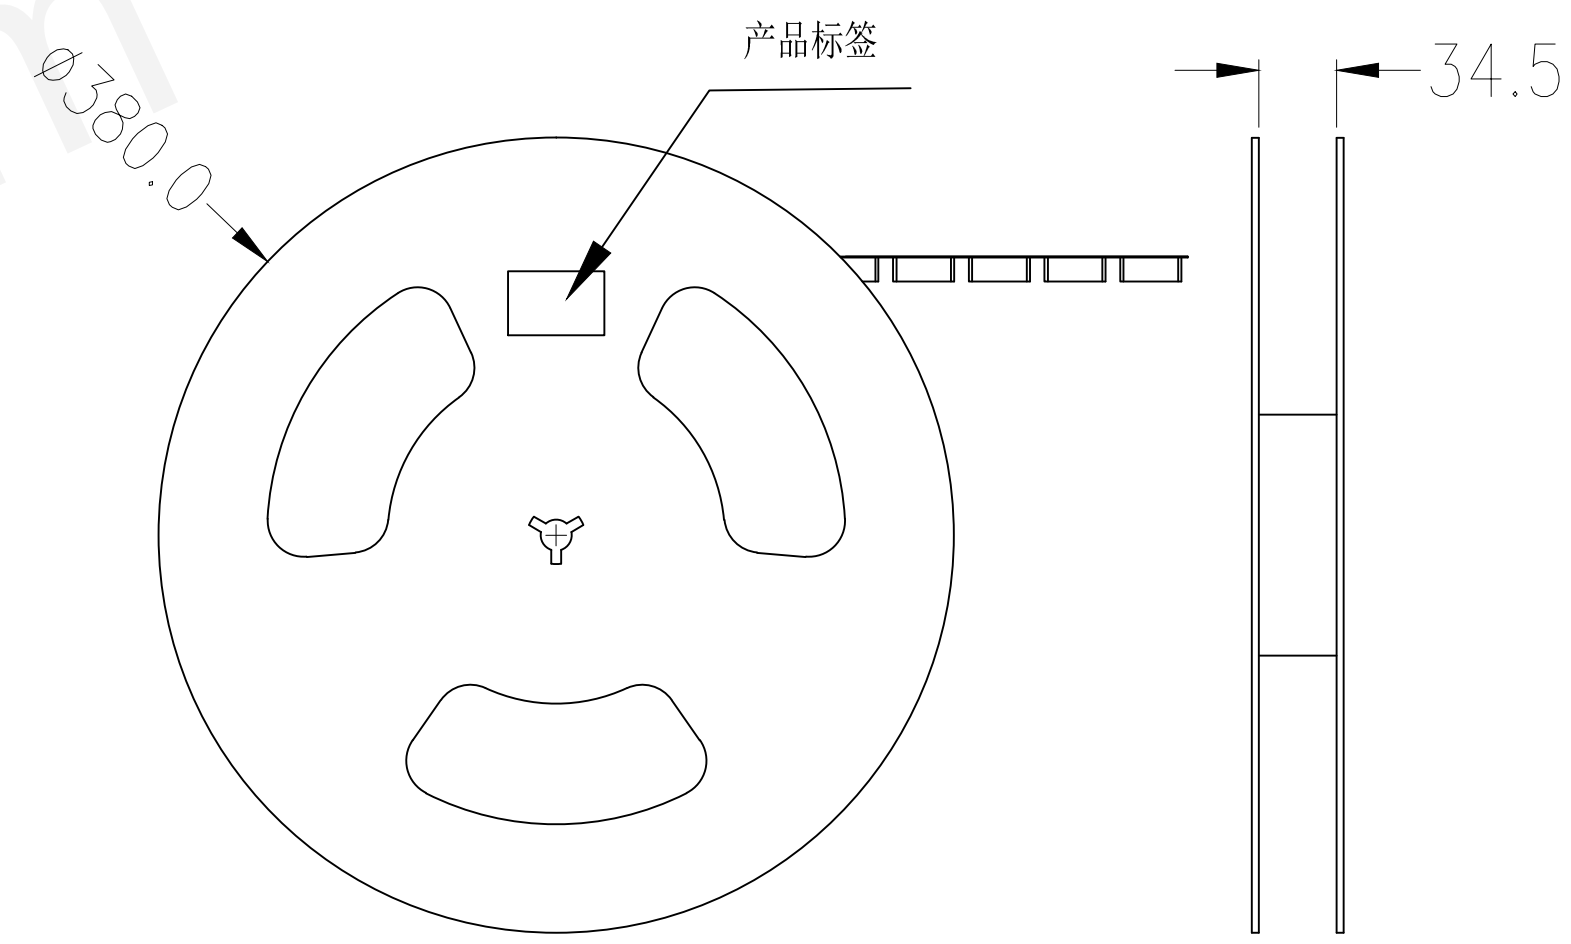

NO.2

1. 包装要求:
- 1.1 每卷包装300pcs, 卷带前后各空出10pcs位置;
 - 1.2 每10盘放一箱, 共计3ksets;
 - 1.3 纸箱外贴上标签

- 备注:
- 1. 若有未装满之零数, 必须用泡棉塞满。
 - 2. 针对于包装方式可根据客户要求包装。

DESIGN	MISS ZENG	SC ALL		未注公差 T00LERANCE		品名: 连接器
DRAWIGN	MISS LI	ANIT		X. ±0.30	X.XX ±0.25	
CHECK	Mr. ZENG	SIZE		X. X ±0.15	X. °±1.00°	型号: HDMI 直立贴板母座 (H=13.0MM)带弹侧弹
APPROVAL		VERSION				



东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.