




REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A				

- NOTES:
SPECIFICATION:
- CURRENT RATING: 8.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 6N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10,000 CYCLES

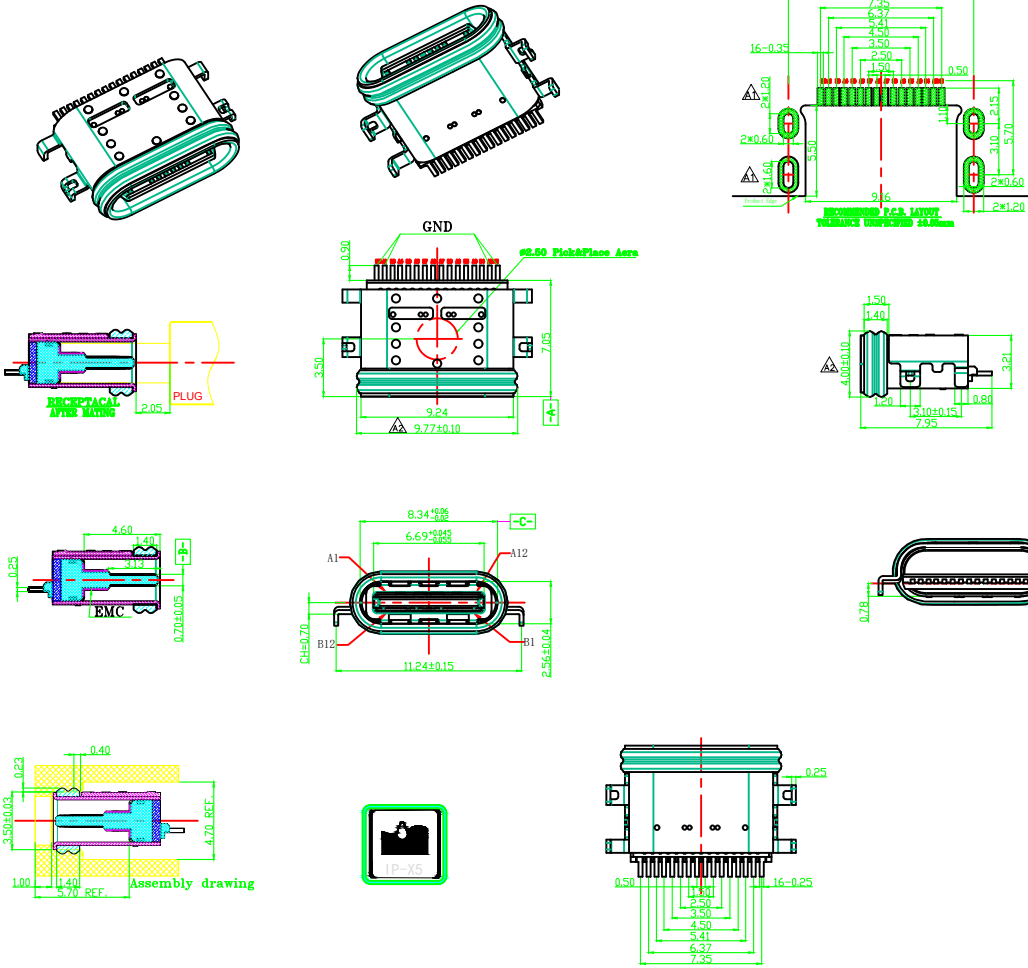

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

10	SEALING	SILICON DIOXIDE	---	1PCS
9	DIAN JIAO	WATERPROOF RESIN	---	1PCS
8	OVER UNDER SHELL	STAINLESS STEEL	---	1PCS
7	OVER SHELL	STAINLESS STEEL	Ni Plated	1PCS
6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	EMC	STAINLESS STEEL	---	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
3	CONTACT	COPPER ALLOY	Au:1u"/Ni Plated	1587
2	CONTACT	COPPER ALLOY	Au:1u"/Ni Plated	1587
1	HOUSING	HIGH TEMPERATURE PLASTIC	PA9T -BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

DESIGN	MISS ZENG	SC ALL			未注公差	TOOLERANCE	品名:	连接器
DRAWIGN	MISS LI	ANIT	MM		X. ±0.50	X" ±2°	型号:	
CHECK	Mr. ZENG	SIZE	A4: 210*297		X. ±0.30	X" ±1°		
APPROVAL		VERSION	01		.XX ±0.20	.XX° ±0.5°		
					.XXX ±0.10			

CUSTOMER DRAWING
TYPE CF 16P SMT WATER PROOF CONN 0.78

东莞市航宏电子科技有限公司
Dongguan Hanghong Electronics Co., Ltd.